


INTERNAL PCB ANTENNAS



An ISO 9001: 2015 Certified Company

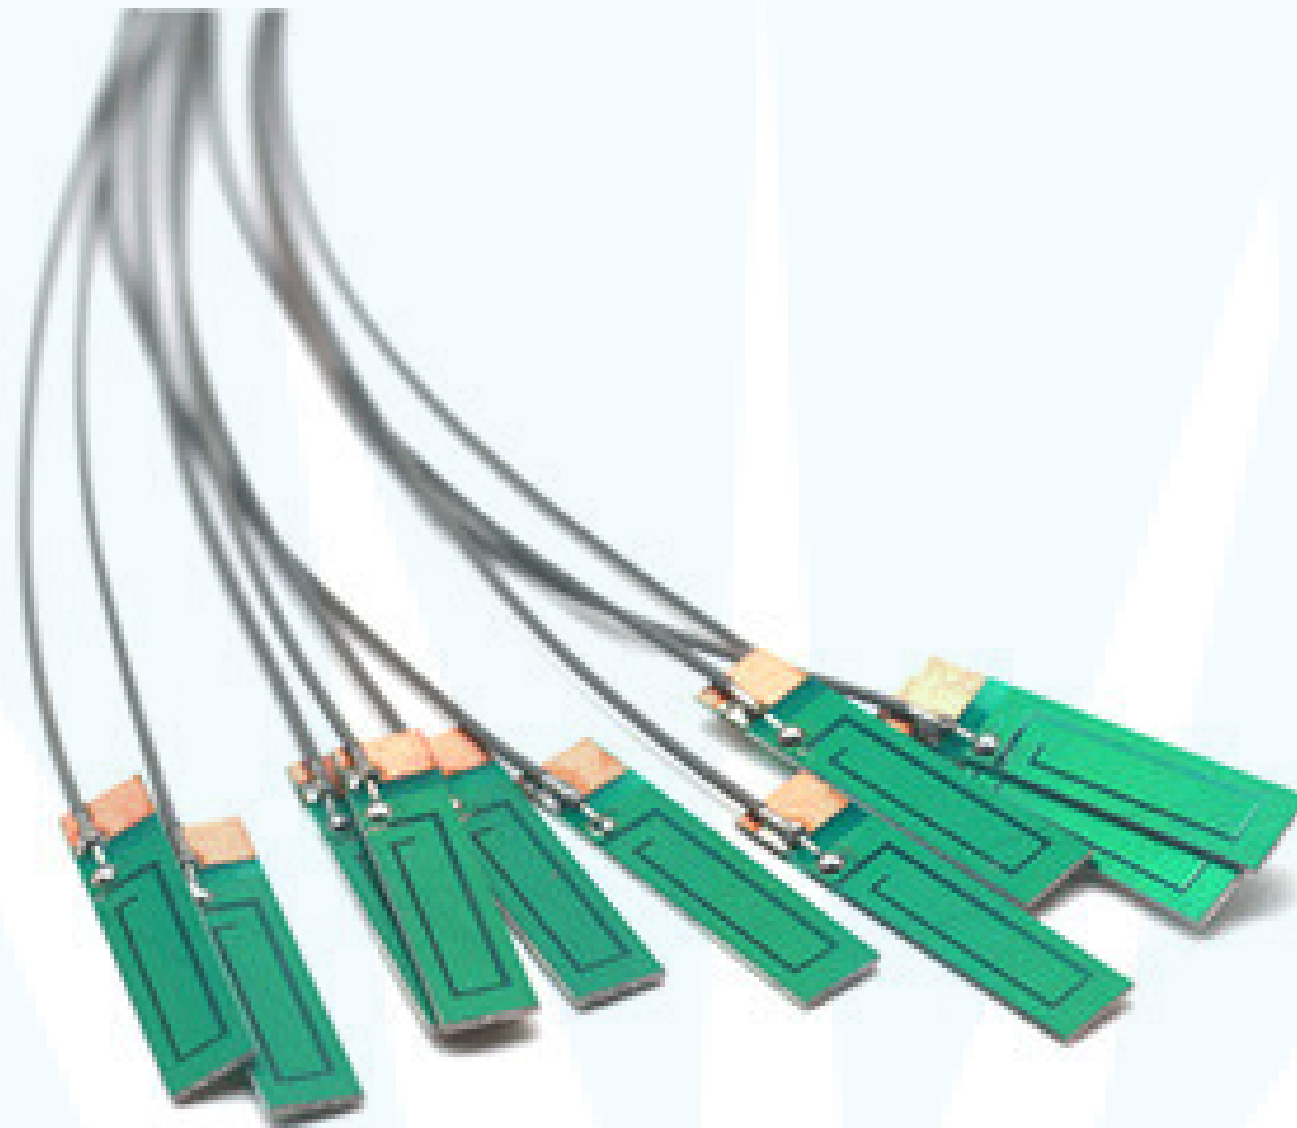

Technical Specifications:

| | |
|-----------------------|-------------------------|
| Model No. | LORAIDA030 |
| Frequency Range | 824-960 MHz |
| Polarization | Vertical |
| Gain | dBi 3 |
| Horizontal Lobe width | 360° |
| Vertical Lobe width | 55° |
| Lightning Protection | DC Ground |
| VSWR | ≤2 |
| Maximum Input Power | 25 W |
| Impedance | 50 ohm |
| Connector Type | UFL/SMA/Open/customized |
| Operating Temp. | -40 to 55C |
| Cable | RG 1.13 Pure Copper |
| Cable Length | 150mm/Customized |
| Weight | 5 Gram |
| ROHS | Complaint |



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/www.gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041