



## Technical Specifications:

Model No.	MIMOI5G014			
Gain	3/5 DBI			
Frequency Range	698-806	806-960	1710-2700	3300-4000 MHz
VSWR	≤ 2.0	≤ 1.8	≤ 1.8	≤ 2.0
Vertical Beamwidth	90°	85°	45°	35°
Horizontal Beamwidth	360°			
Polarization Type	± 45°			
PIM(IM3)	≤ -153 dBc @ 2 x 43 dBm			
Max Power	50 W			
Input Impedance	50 Ω			

---

Operating Temperature	-40 °C to +65°C
Relative Humidity	5 to 95%
Lightning Protection	DC ground

---

Connector	N-Female
Radome Material	ABS
Radome Color	White
Mounting Type	Ceiling Installation
Cable	RG 58
Cable Length	200 MM

## Features

- ▣ Wide Frequency Range
- ▣ Excellent Electrical Performance
- ▣ Maintenance Free



**CALL OR**  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

[Info@gleamlightindia.com](mailto:Info@gleamlightindia.com) / [www.gleamlightindia.in](http://www.gleamlightindia.in) / [www.gleamindia.com](http://www.gleamindia.com)

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041




# 5G MIMO OMNI CEILING ANTENNA






An ISO 9001: 2015 Certified Company



## Radiation

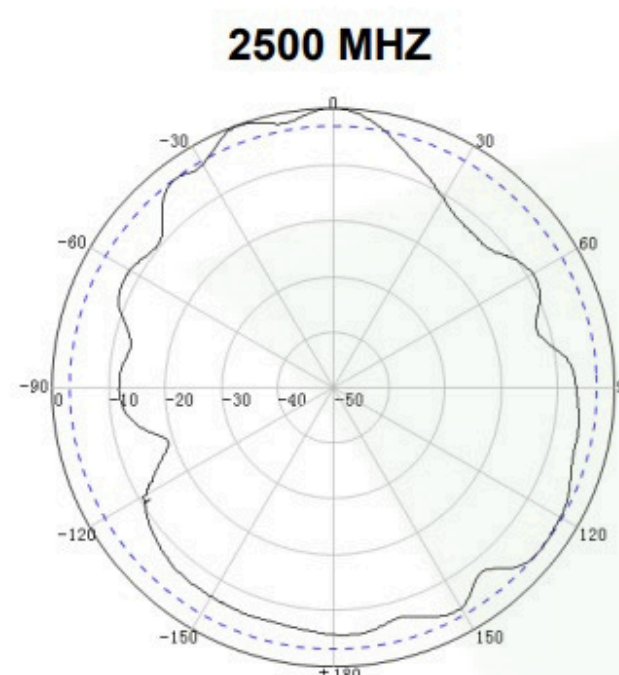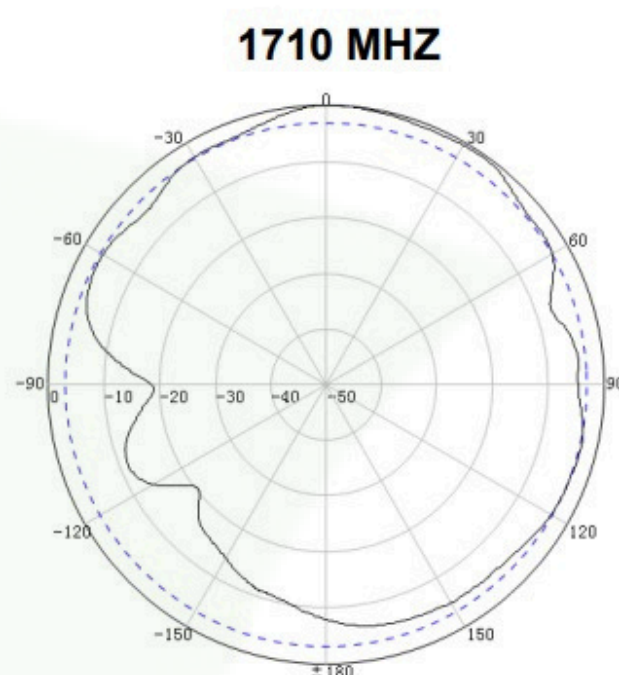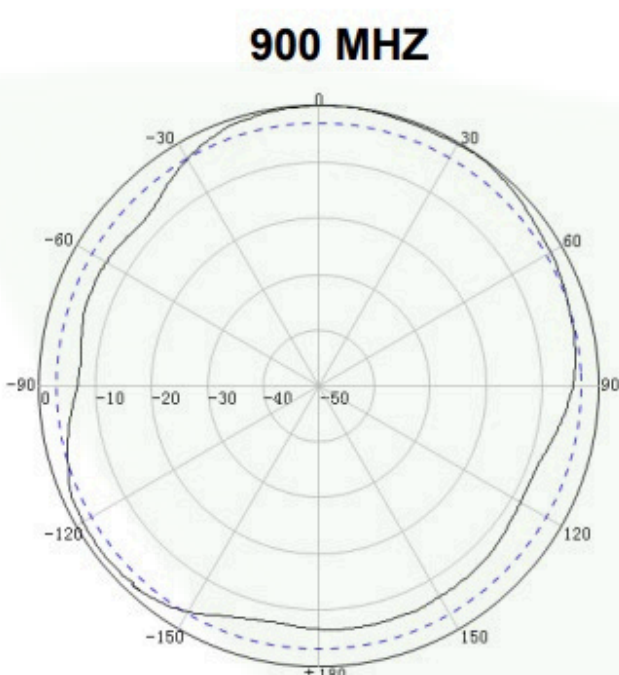

Horizontal

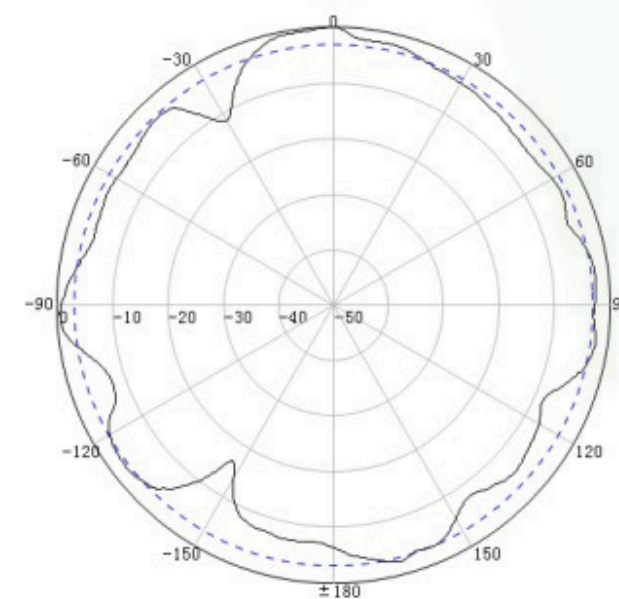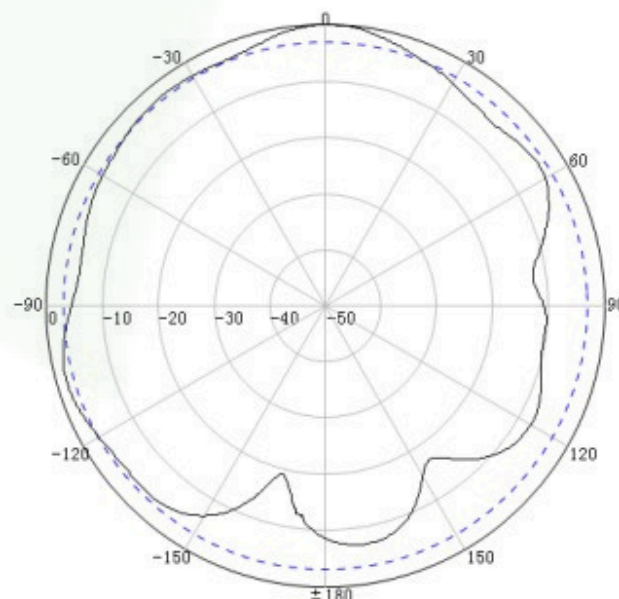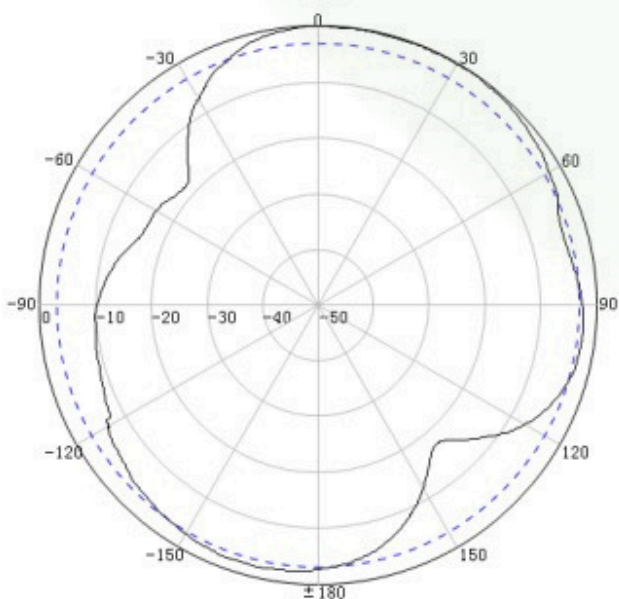

Vertical

**\*Images only for reference\***



CALL OR  +91-8800386366

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

[Info@gleamlightindia.com](mailto:Info@gleamlightindia.com) / [www.gleamlightindia.in](http://www.gleamlightindia.in) / [www.gleamlightindia.com](http://www.gleamlightindia.com) / [www.gleamindia.com](http://www.gleamindia.com)

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041