



An ISO 9001:2015 Certified Company

5G MIMO PATCH PANEL ANTENNA

Technical Specifications:

Model No -	MIMO05G014
Gain (DBI)	8 DBI
Frequency Range (MHz)	698-806 806-960 1710-2170 2200-2700 3300-4000
Vertical Beamwidth	73° 70° 60° 45° 30°
Horizontal Beamwidth	80° 80° 65° 60° 55°
VSWR	≤ 1.8
Polarization Type	Linear H / V for each Radiator
PIM(IM3)	≤ -107 dBm @ 2 x 33 dBm
Max Power	50 W
Input Impedence	50 Ω

Operating Temperature	-40 °C to +65 °C
Relative Humidity	5 to 95%
Lightning Protection	DC ground

Connector	N-Female / Customize
Radome Material	ABS
Radome Color	White
Mounting Type	Wall Mounting
Cable	RG58
Cable Lengh	200 MM

Features

- Wide Frequency Range
- Excellent Electrical Performance
- Maintenance Free

Images only for reference

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041





An ISO 9001: 2015 Certified Company

5G MIMO PATCH PANEL ANTENNA






Radiation




900 MHZ

1710 MHZ

3500 MHZ

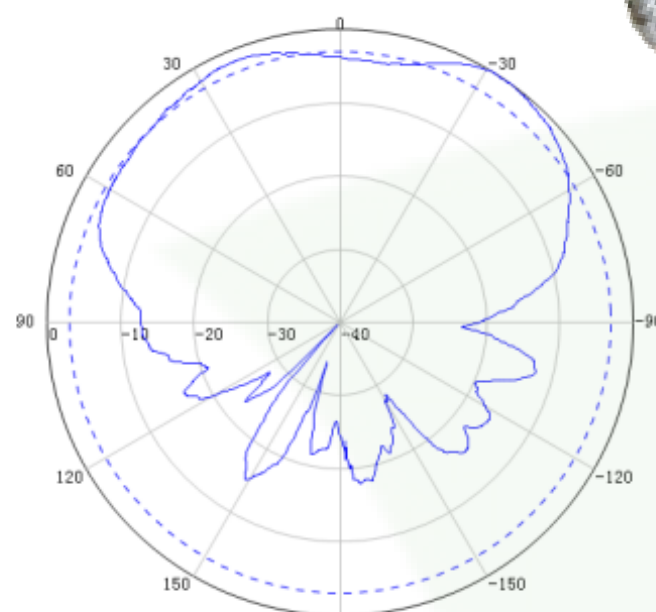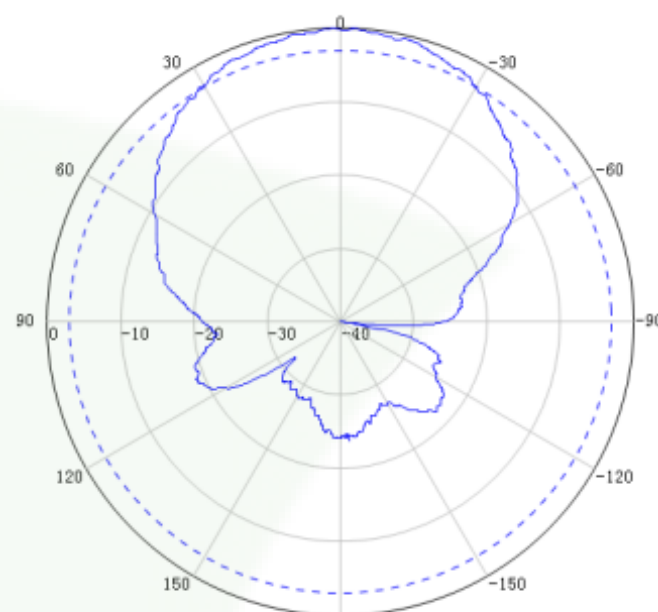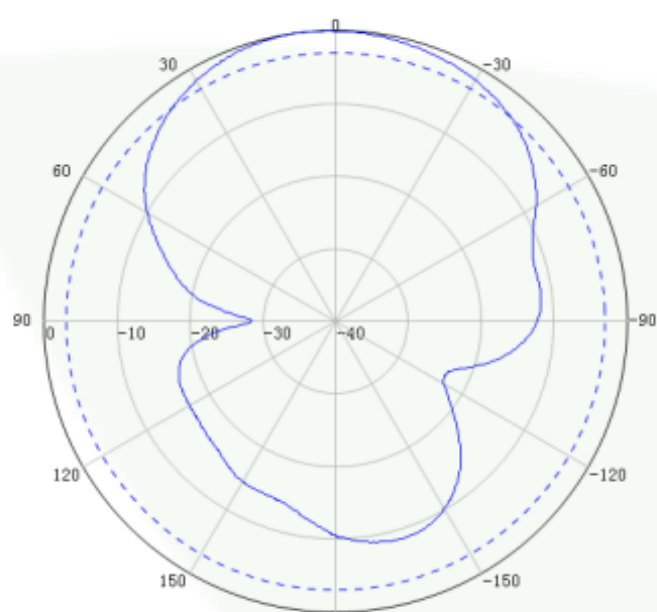



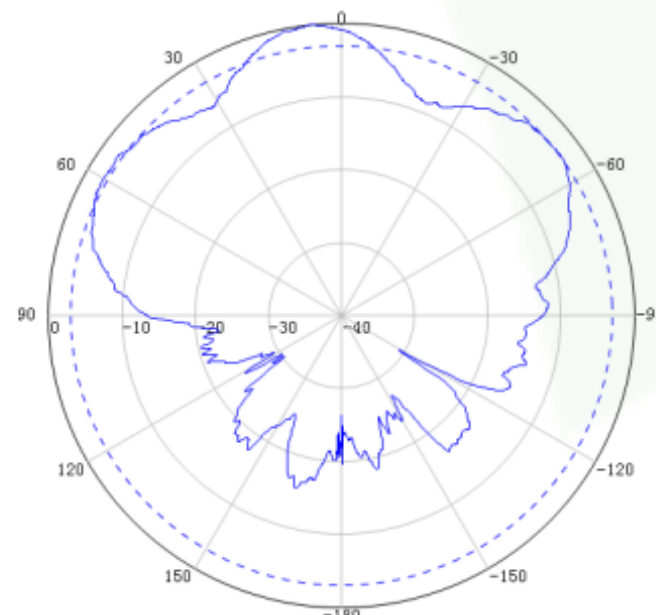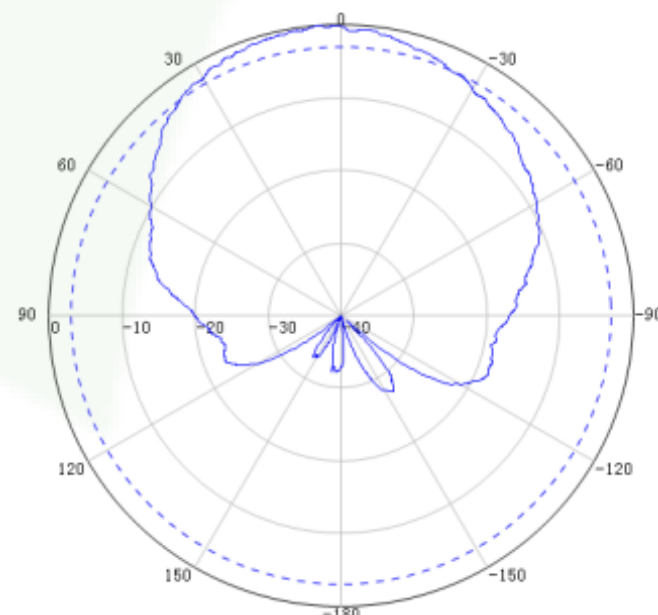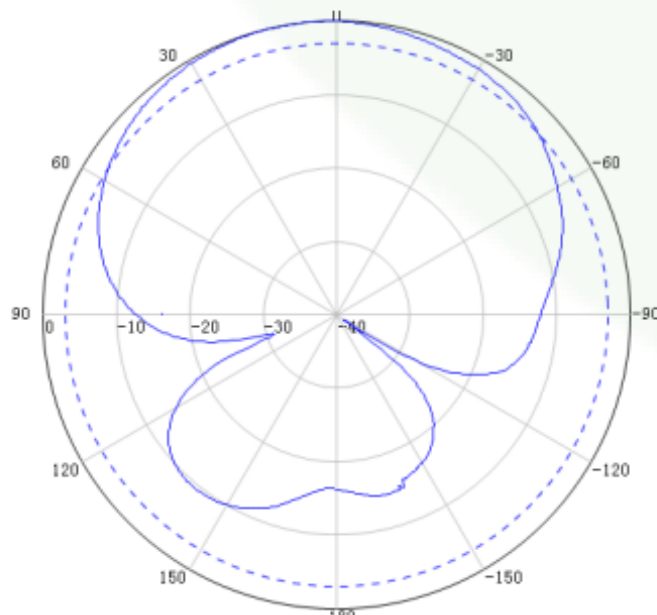


Horizontal



Vertical

Images only for reference

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

