



An ISO 9001:2015 Certified Company

5G OMNI CEILING ANTENNA

Technical Specifications:

| | | | | |
|-----------------------|-------------------------|---------|-----------|-----------|
| Model No - | COMNI5G040 | | | |
| Frequency Range (MHz) | 698-806 | 806-960 | 1710-2700 | 3300-3800 |
| Gain (DBI) | 3/5 DBI | | | |
| VSWR | ≤ 1.8 | ≤ 1.5 | ≤ 1.5 | ≤ 1.5 |
| Horizontal Beamwidth | 360° | | | |
| Polarization Type | Vertical | | | |
| PIM(IM3) | ≤ -140 dBm @ 2 x 33 dBm | | | |
| Max Power | 50 W | | | |
| Input Impedence | 50 Ω | | | |

| | |
|-----------------------|------------------|
| Operating Temperature | -40 °C to +65 °C |
| Relative Humidity | 5 to 95% |
| Lightning Protection | DC ground |

| | |
|-----------------|----------------------|
| Connector | N-Female |
| Radome Material | ABS |
| Radome Color | White |
| Mounting Type | Ceiling Installation |
| Cable | 58 |
| Cable Length | 200 MM |

Features

- Wide Frequency Range
- Excellent Electrical Performance
- Maintenance Free



CALL OR **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /


Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041



An ISO 9001:2015 Certified Company

5G OMNI CEILING ANTENNA



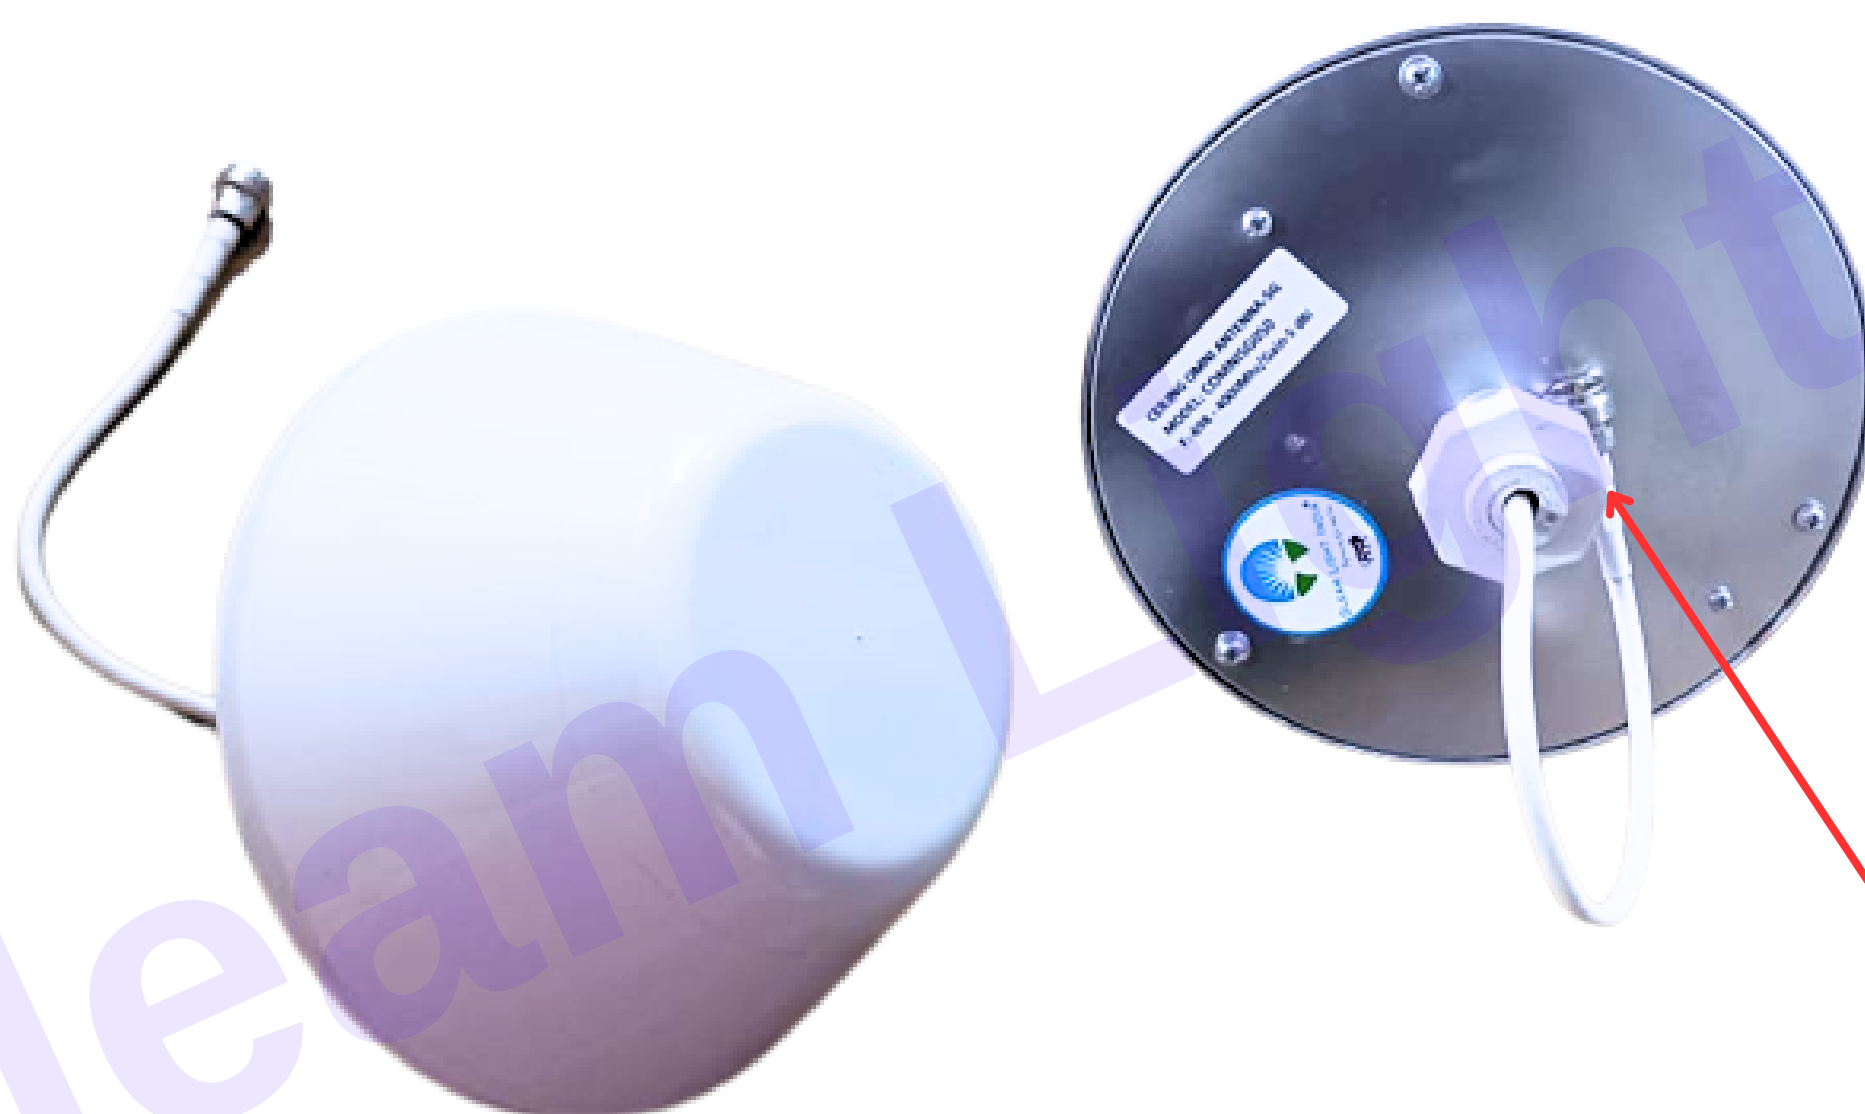


Radiation




900 MHZ

1710 MHZ

2500 MHZ

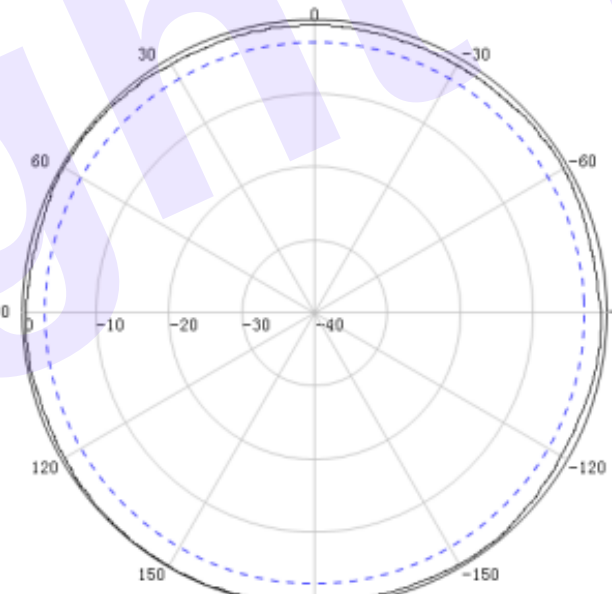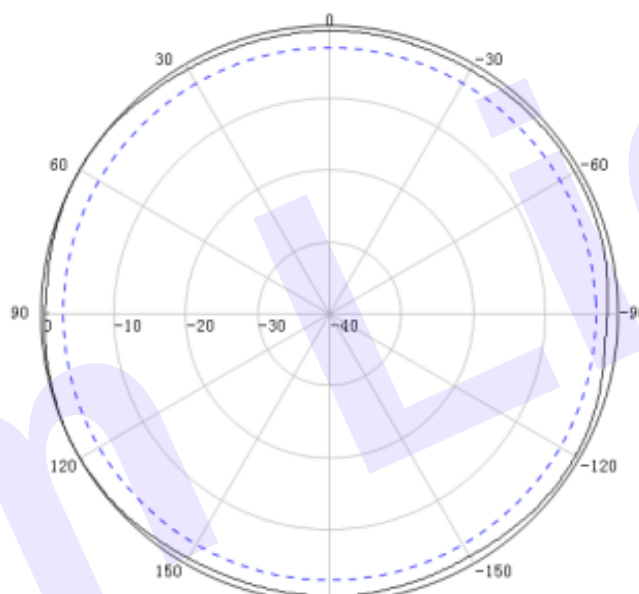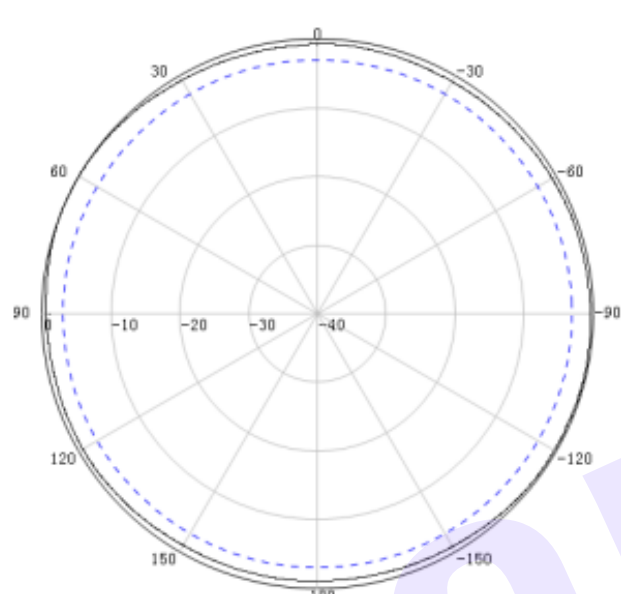

Horizontal

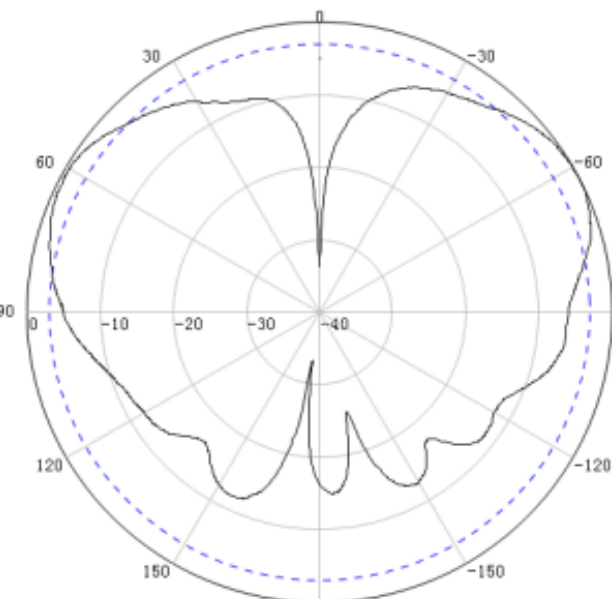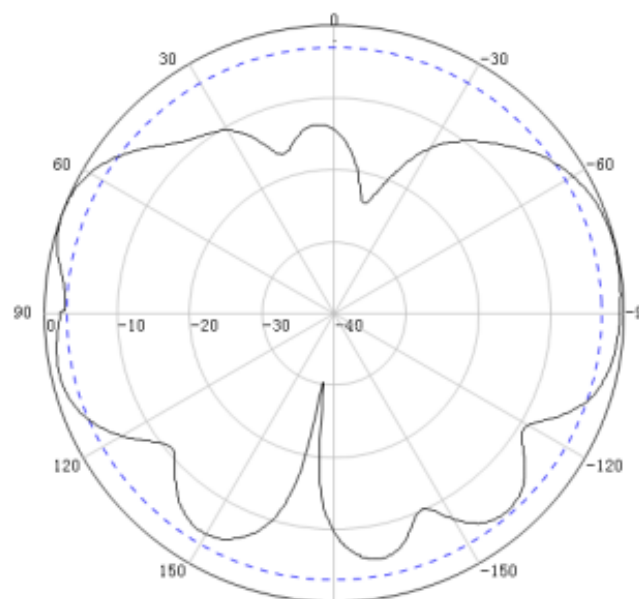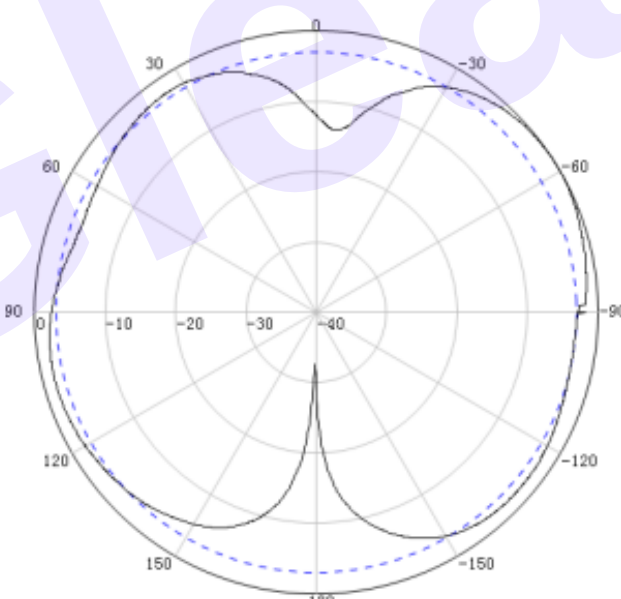

Vertical



CALL OR +91-8800386366

Follow Us For More Updates **GLEAMLIGHTINDIA** /
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041