


5G Patch Panel Antenna



An ISO 9001: 2015 Certified Company

Technical Specifications:

Model No-	PAPABS5G80
Frequency Range (MHz)-	698-4000 MHz
Polarization-	Vertical
Gain-	8 Dbi
VSWR-	≤ 2.0
Lightning Protection-	DC ground
Operating Temperature-	-40 °C to +65 °C
Horizontal Lobe width (°)-	55
Vertical Lobe width (°)-	35
Maximum Input Power (W)	50
Input Impedence-	50 Ω
Connector Type-	N Female / Customized
Weight-	400 Gms
Passive Intermod (IM3)	< -150dBc@(2x20W)
Max Power Handling-	50W
Cable-	Yes
Cable Length*-	300MM
Radome Material-	ABS
Radiator Material-	PCB/Aluminum
Radome Color-	White
Mounting Type-	Wall/Pole Mountable

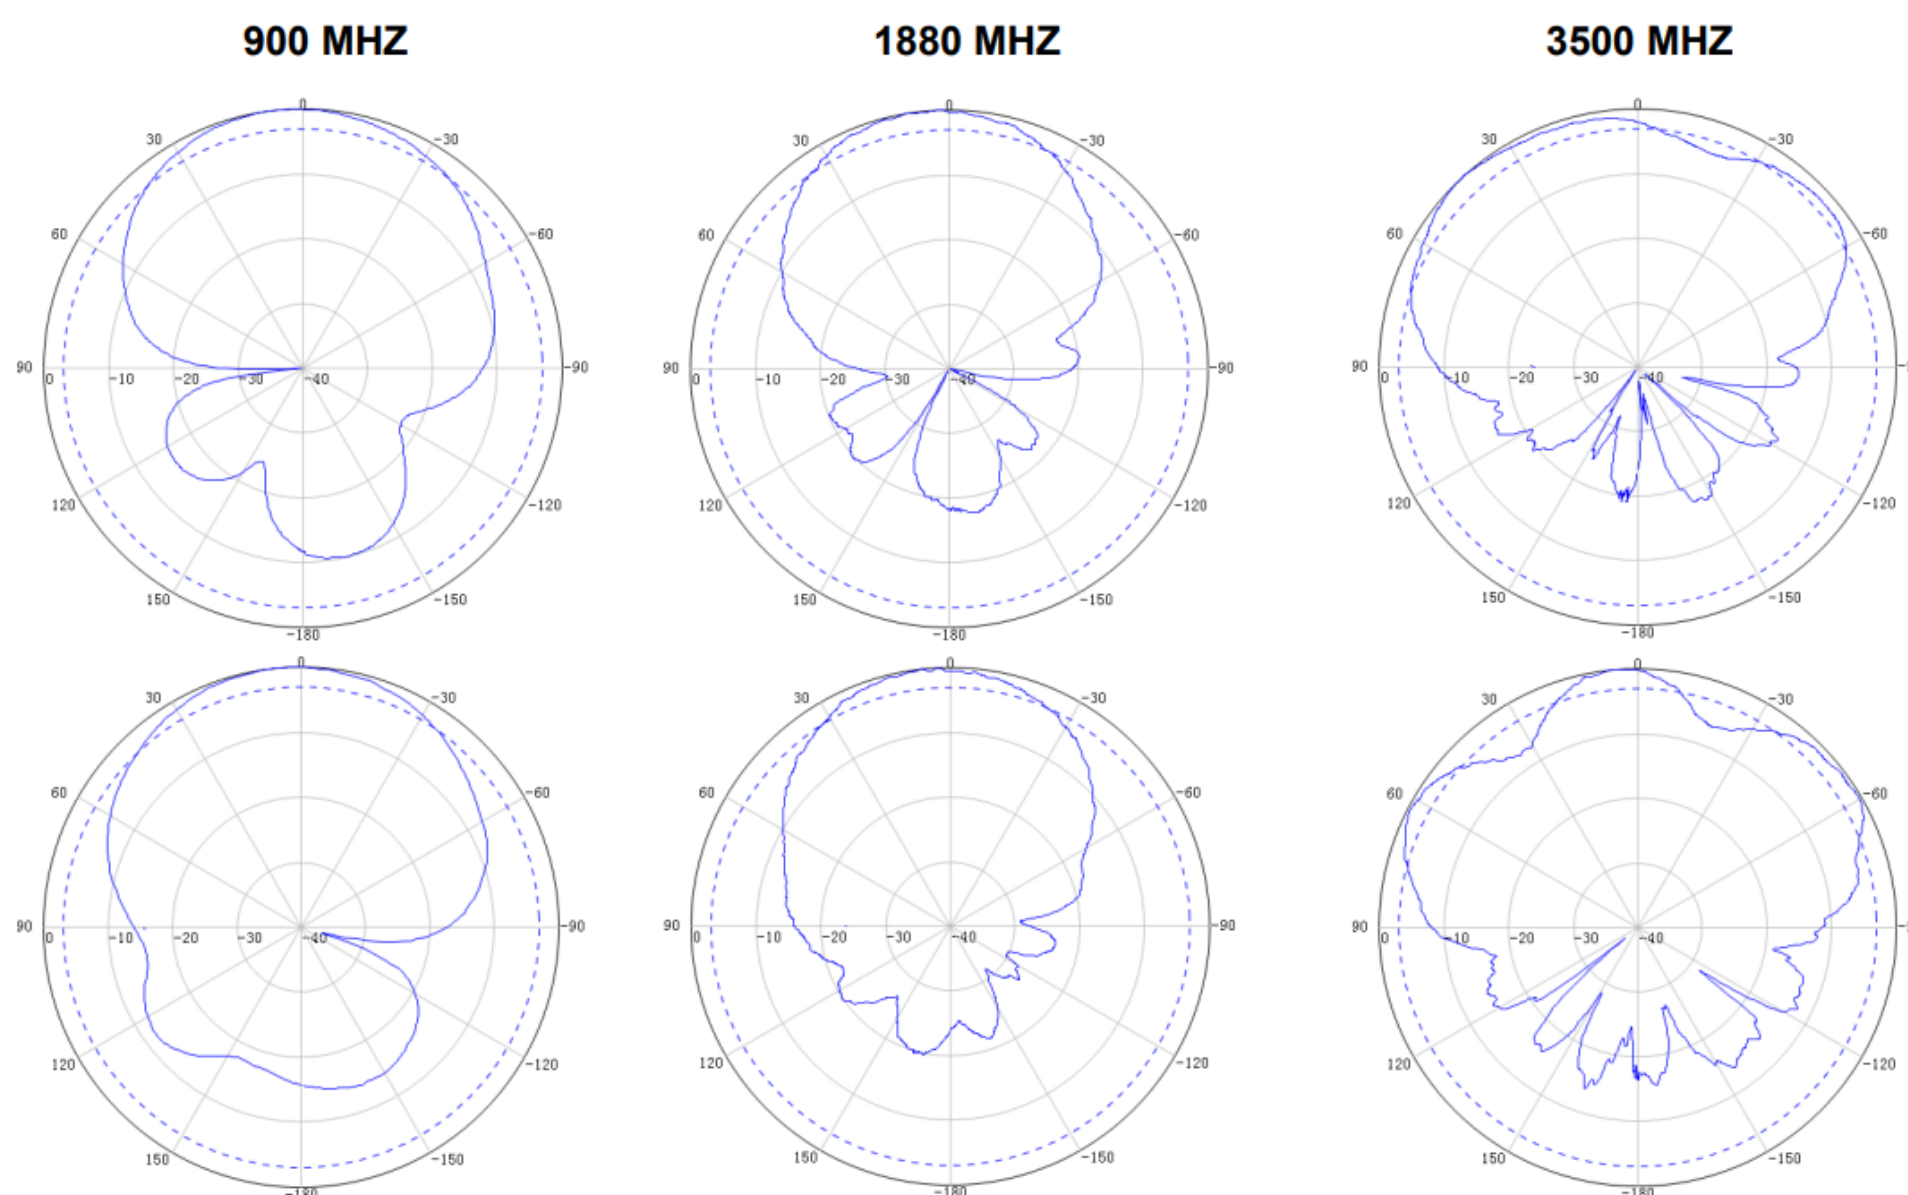

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA**     
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

F-2 Gali No-2 Rajendra Park Ext Nangloi New Delhi -110041