


5G Patch Panel Antenna



An ISO 9001: 2015 Certified Company

Technical Specifications:

Model No-	PPAABS5G80
Frequency Range (MHz)-	698-4000 MHz
Polarization-	Vertical
Gain-	8 Dbi
VSWR-	≤ 2.0
Lightning Protection-	DC ground
Operating Temperature-	-40 °C to +65 °C
Horizontal Lobe width (°)-	55
Vertical Lobe width (°)-	35
Maximum Input Power (W)	50
Input Impedence-	50Ω
Connector Type-	N Female / Customized
Weight-	400Gms
Passive Intermod (IM3)	<-150dBc@(2x20W)
Max Power Handling-	50W
Cable-	Yes
Cable Length*-	300MM
Radome Material-	ABS
Radiator Material-	PCB/Aluminum
Radome Color-	White
Mounting Type-	Wall/Pole Mountable

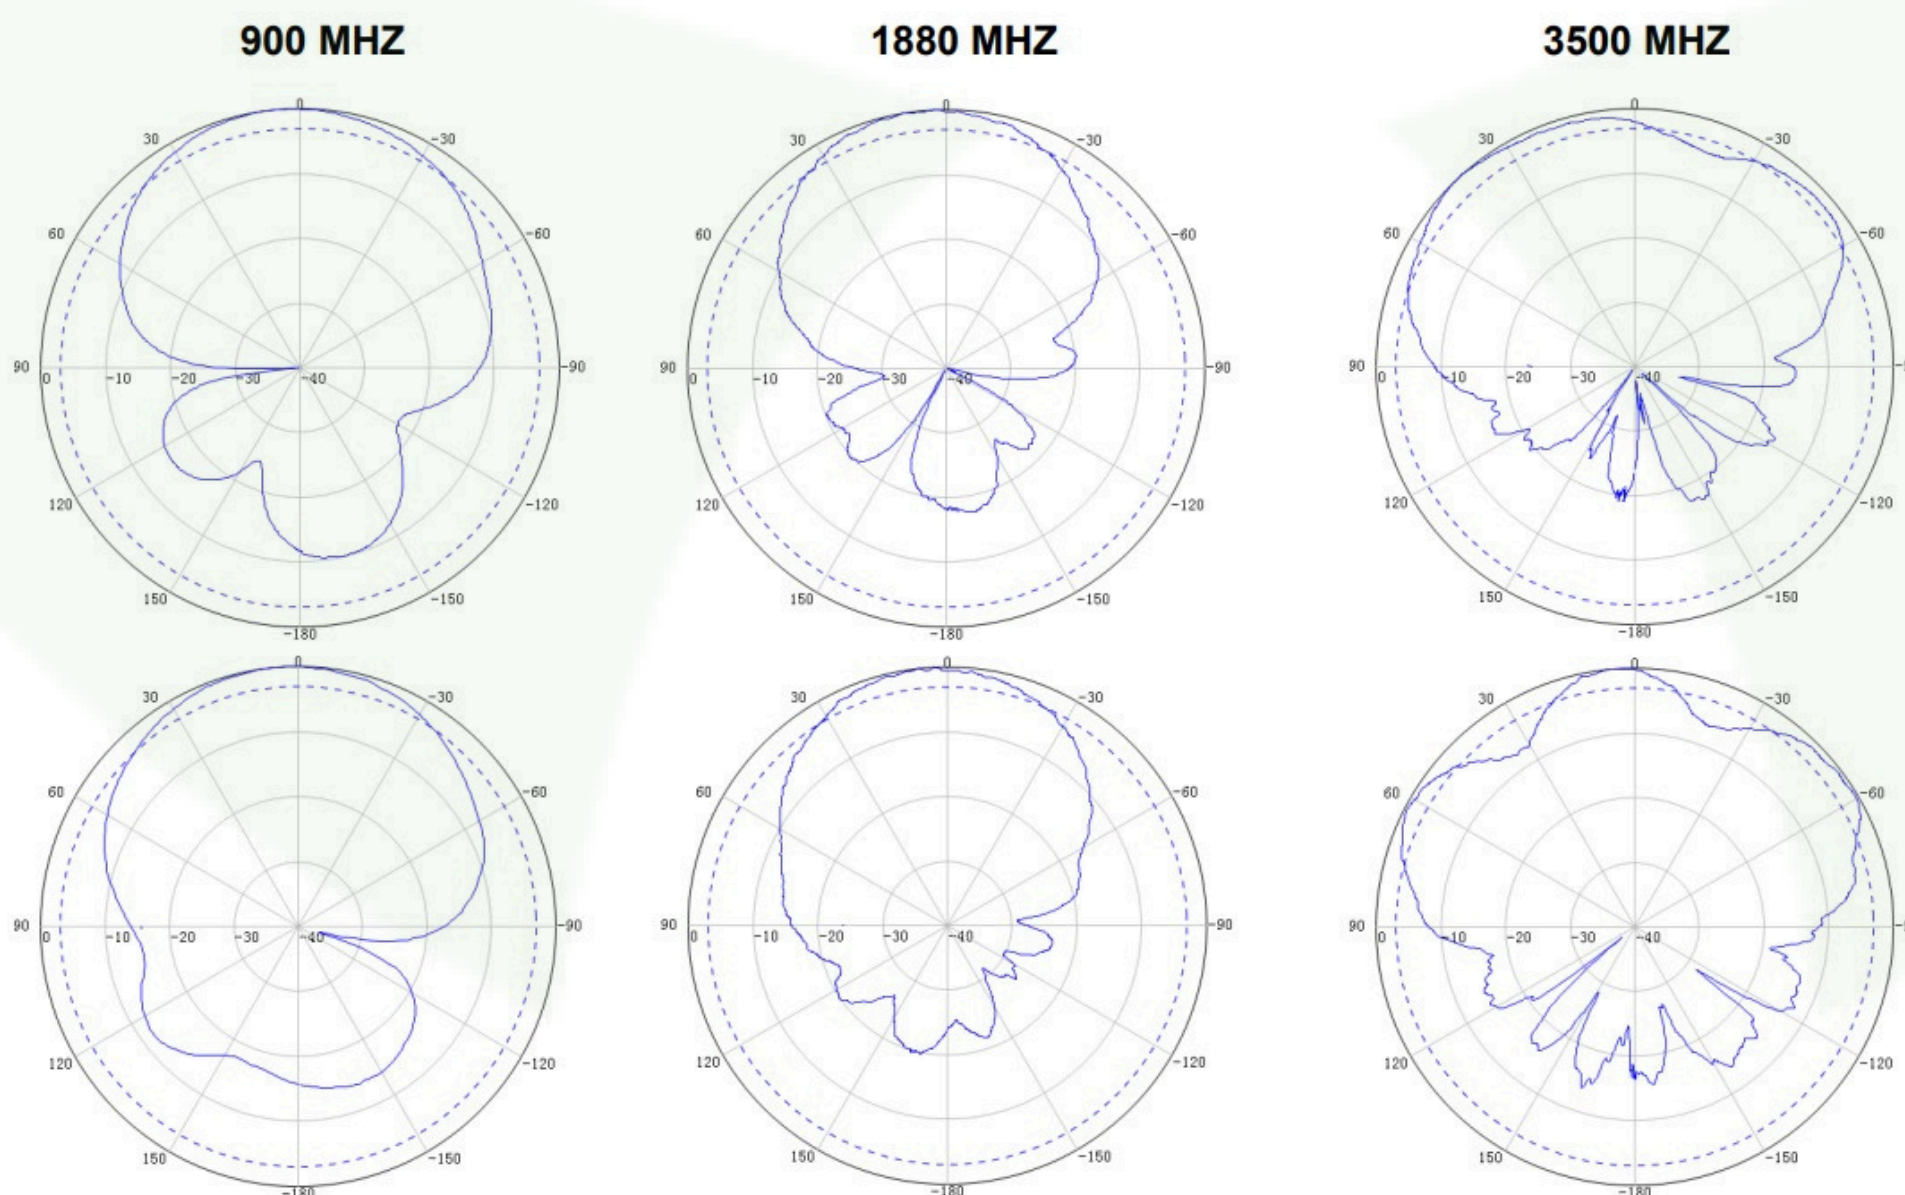

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041