



An ISO 9001:2015 Certified Company

5G MIMO PATCH PANEL ANTENNA

Technical Specifications:

Model No -	MIMO05G014				
Gain (DBI)	8 DBI				
Frequency Range (MHz)	698-806	806-960	1710-2170	2200-2700	3300-3800
Vertical Beamwidth	73°	70°	60°	45°	30°
Horizontal Beamwidth	80°	80°	65°	60°	55°
VSWR	≤ 1.8				
Polarization Type	Linear H / V for each Radiator				
PIM(IM3)	≤ -107 dBm @ 2 x 33 dBm				
Max Power	50 W				
Input Impedence	50 Ω				

Operating Temperature	-40 °C to +65 °C
Relative Humidity	5 to 95%
Lightning Protection	DC ground

Connector	N-Female
Radome Material	ABS
Radome Color	White
Mounting Type	Wall Mounting
Cable	RG58
Cable Length	200 MM

Features

- Wide Frequency Range
- Excellent Electrical Performance
- Maintenance Free

Images only for reference

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041






An ISO 9001:2015 Certified Company

5G MIMO PATCH PANEL ANTENNA



Radiation

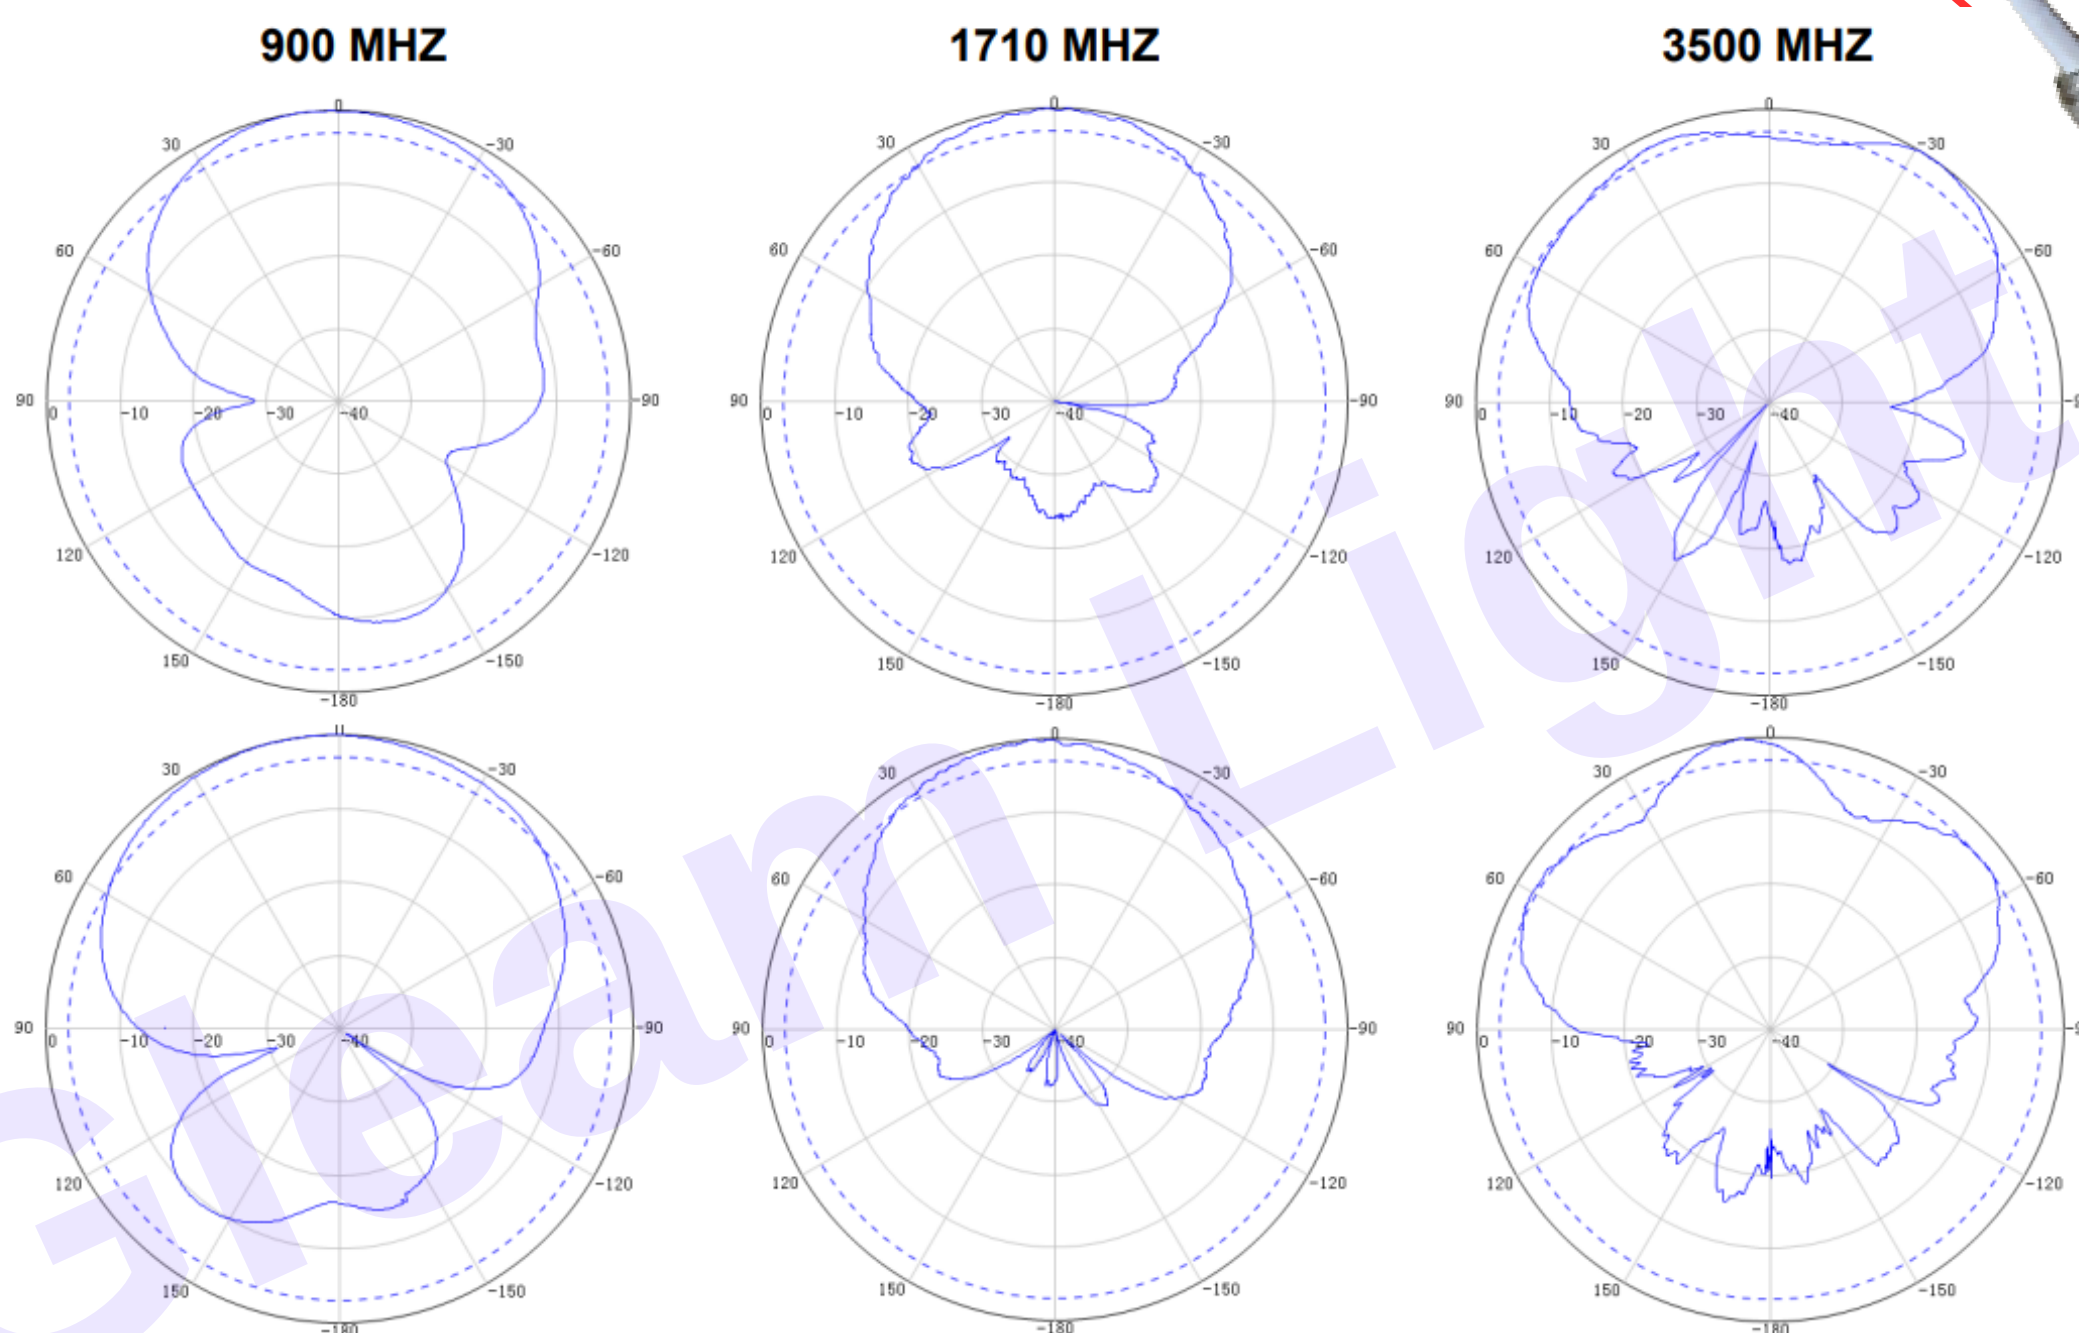






Horizontal

Vertical

Images only for reference

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

