


# CDMA INTERNAL PCB ANTENNA



An ISO 9001: 2015 Certified Company

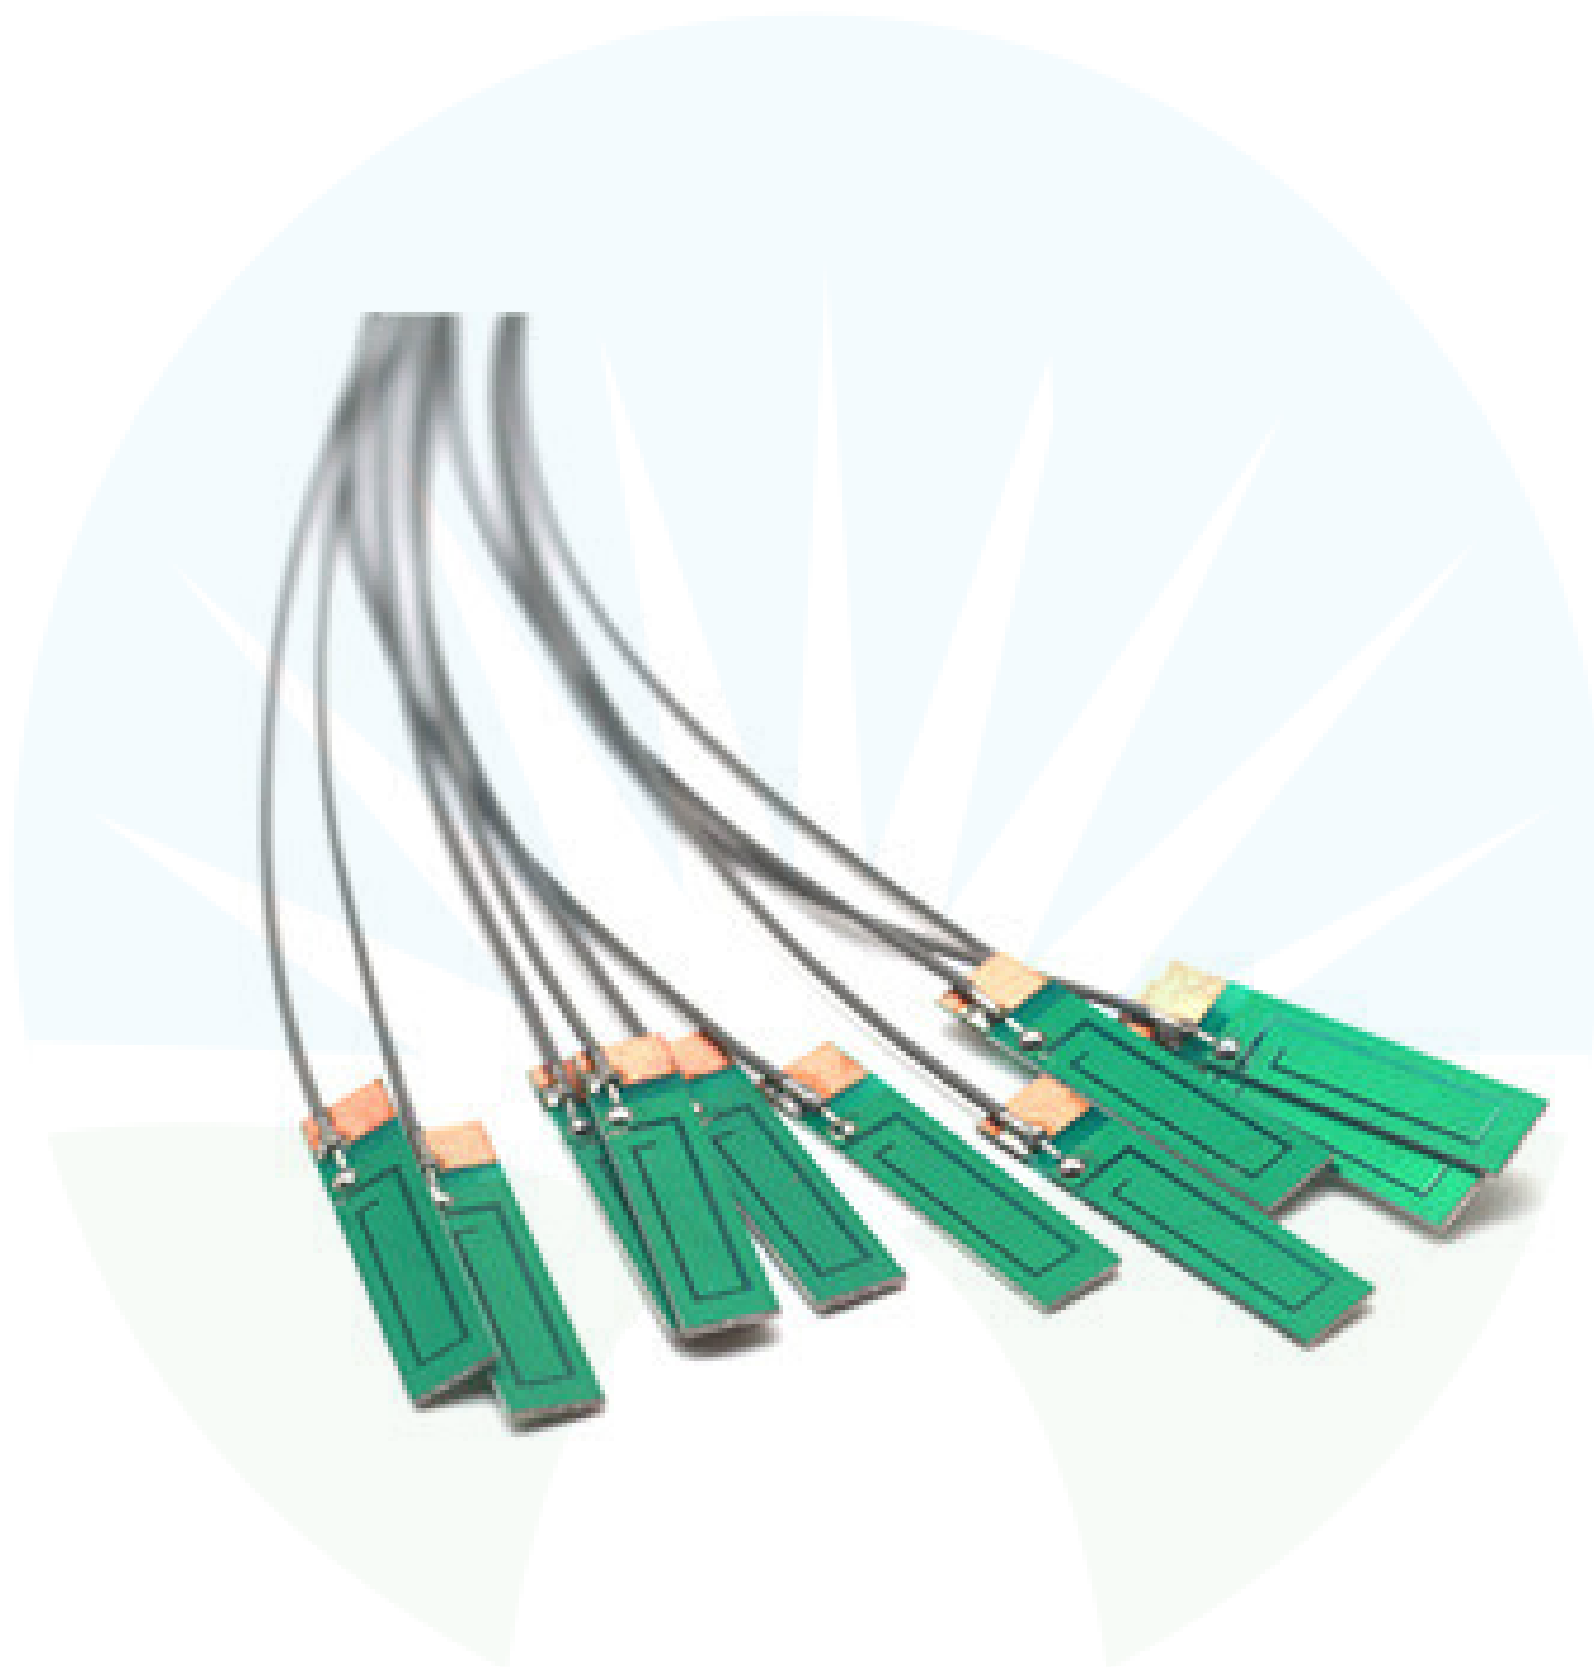

## Technical Specifications:

Model No-	CDMAIDA030
Frequency Range (MHz) -	890-960 /1850-1990MHz
Polarization -	Vertical
Gain-	dBi 3
Horizontal Lobe width (°) -	360
Vertical Lobe width (°)	55
Lightning Protection	DC Ground
VSWR	≤2
Maximum Input Power (W)	25
Impedance(ohm)	50
Connector Type	UFL/SMA/Open/customized
Operating Temp -	-40 to 55C
Cable	RG 1.13(Pure Copper)
Cable Length	150mm/Customized
Weight	5Gram



**CALL OR**  **+91-8800386366**

Follow Us For More Updates  **GLEAMLIGHTINDIA**  
Info@gleamlightindia.com [www.gleamlightindia.in](http://www.gleamlightindia.in)/[www.gleamlightindia.com](http://www.gleamlightindia.com)/[www.gleamindia.com](http://www.gleamindia.com)  
12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041