


# CDMA Patch Panel Antenna



An ISO 9001: 2015 Certified Company

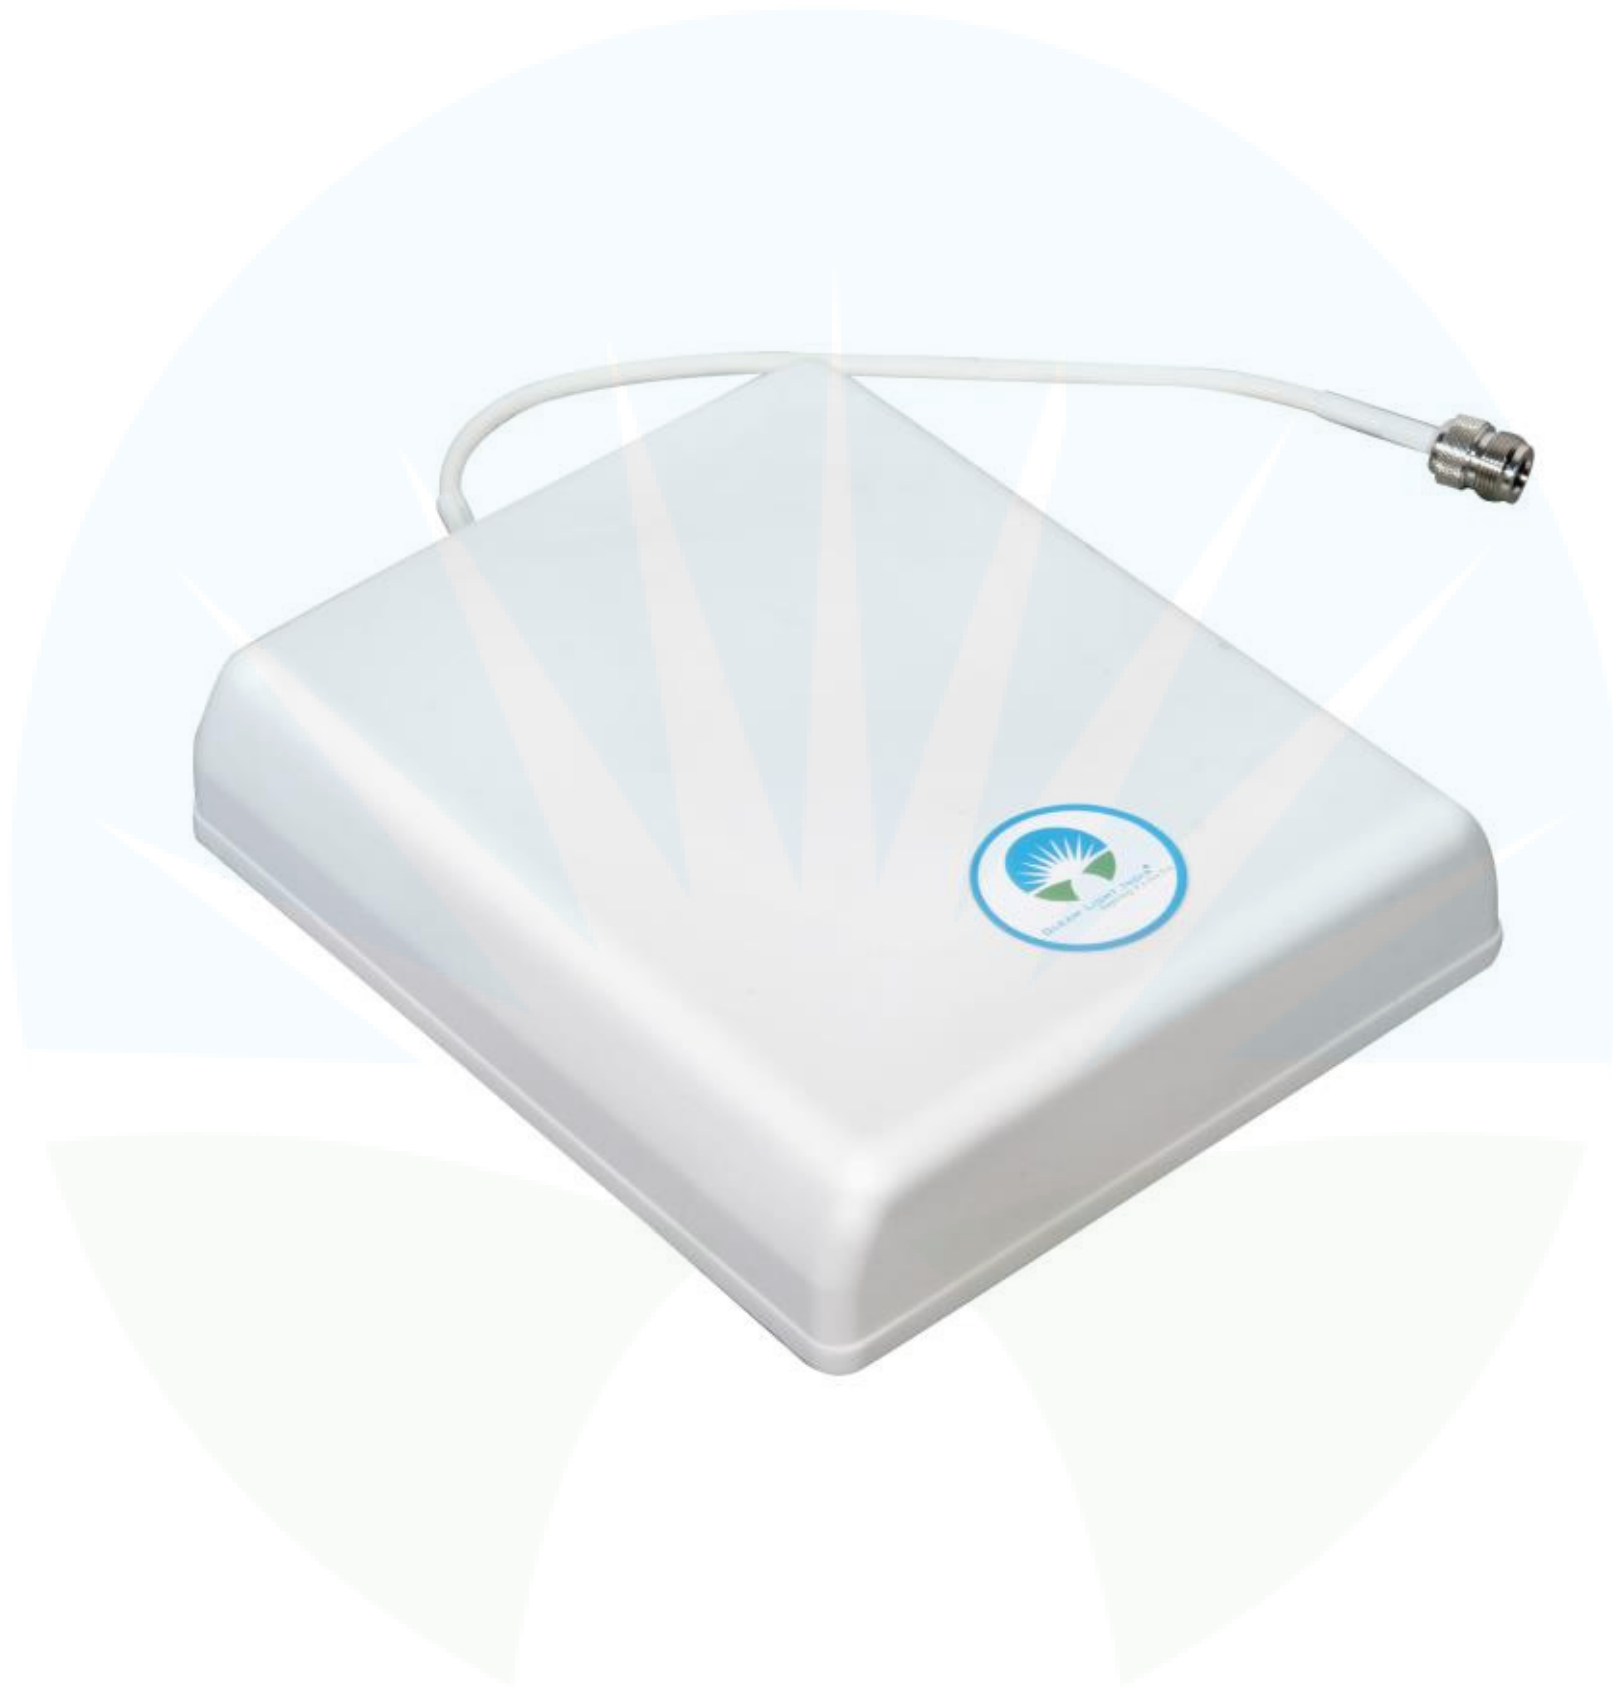

## Technical Specifications

Model No -	PPAID2G070
Frequency Range -	824-960/1710-1800MHz
Polarization -	Vertical
Gain -	7.5/8 Dbi
Horizontal Lobe width -	360°
Vertical Lobe width -	55°
Lightning Protection -	DC Ground
VSWR -	≤1.5
Maximum Input Power -	≤1.5W
Impedance -	50ohm
Connector Type -	N Female/customized
Operating Temp. -	-40-60
Radom Material -	ABS
Radom Color -	White
Cable -	RG58
Cable Length -	330 mm/ customized



**CALL OR**  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /       
Info@gleamlightindia.com [www.gleamlightindia.in](http://www.gleamlightindia.in)/[www.gleamlightindia.com](http://www.gleamlightindia.com)/[www.gleamindia.com](http://www.gleamindia.com)

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041