

# GSM RUBBER DUCK ANTENNA



An ISO 9001: 2015 Certified Company



## Technical Specifications:

Model No.	GSMIDSMA02
Frequency Range	824~894/1710~2170MHz
Polarization	Linear
Gain	0-2 (Zenith) dBi
VSWR	≤2.5
Maximum Input Power	50 w
Impedance	50 W
Connector Type	SMA M / RP SMA M
Operating Temp.	-40-80
Radome Material	ABS/PP
Radom Color	Black



**CALL OR**  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /       
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

# GSM RUBBER DUCK ANTENNA



An ISO 9001: 2015 Certified Company





## Gain 2 DBI

824-2170 MHZ

Rubber Protector, Waterproof and Prevent from Oxidization

### High-quality interface

Quality Screw interface, makes the connection closer and signal more stable

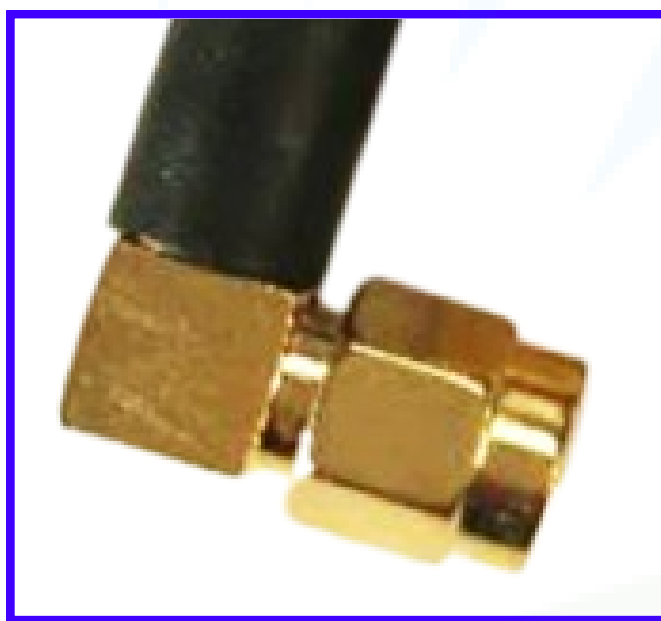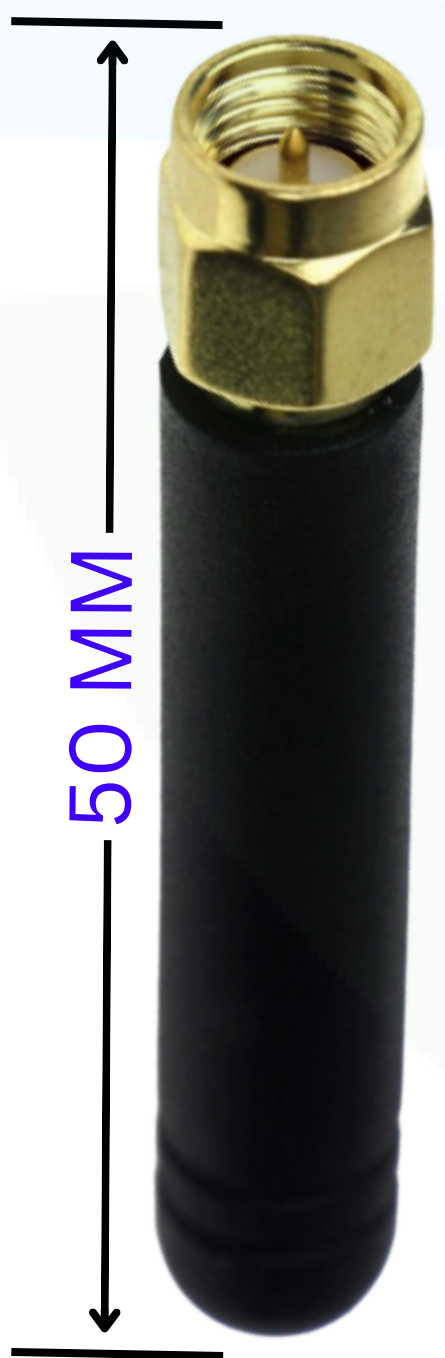

### Right Angle 90°



### Straight 180°




### Connector Type



### SMA M

### RP SMA M



**CALL OR**  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /       
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041