


# LPDA ANTENNA 12 DBI



An ISO 9001:2015 Certified Company

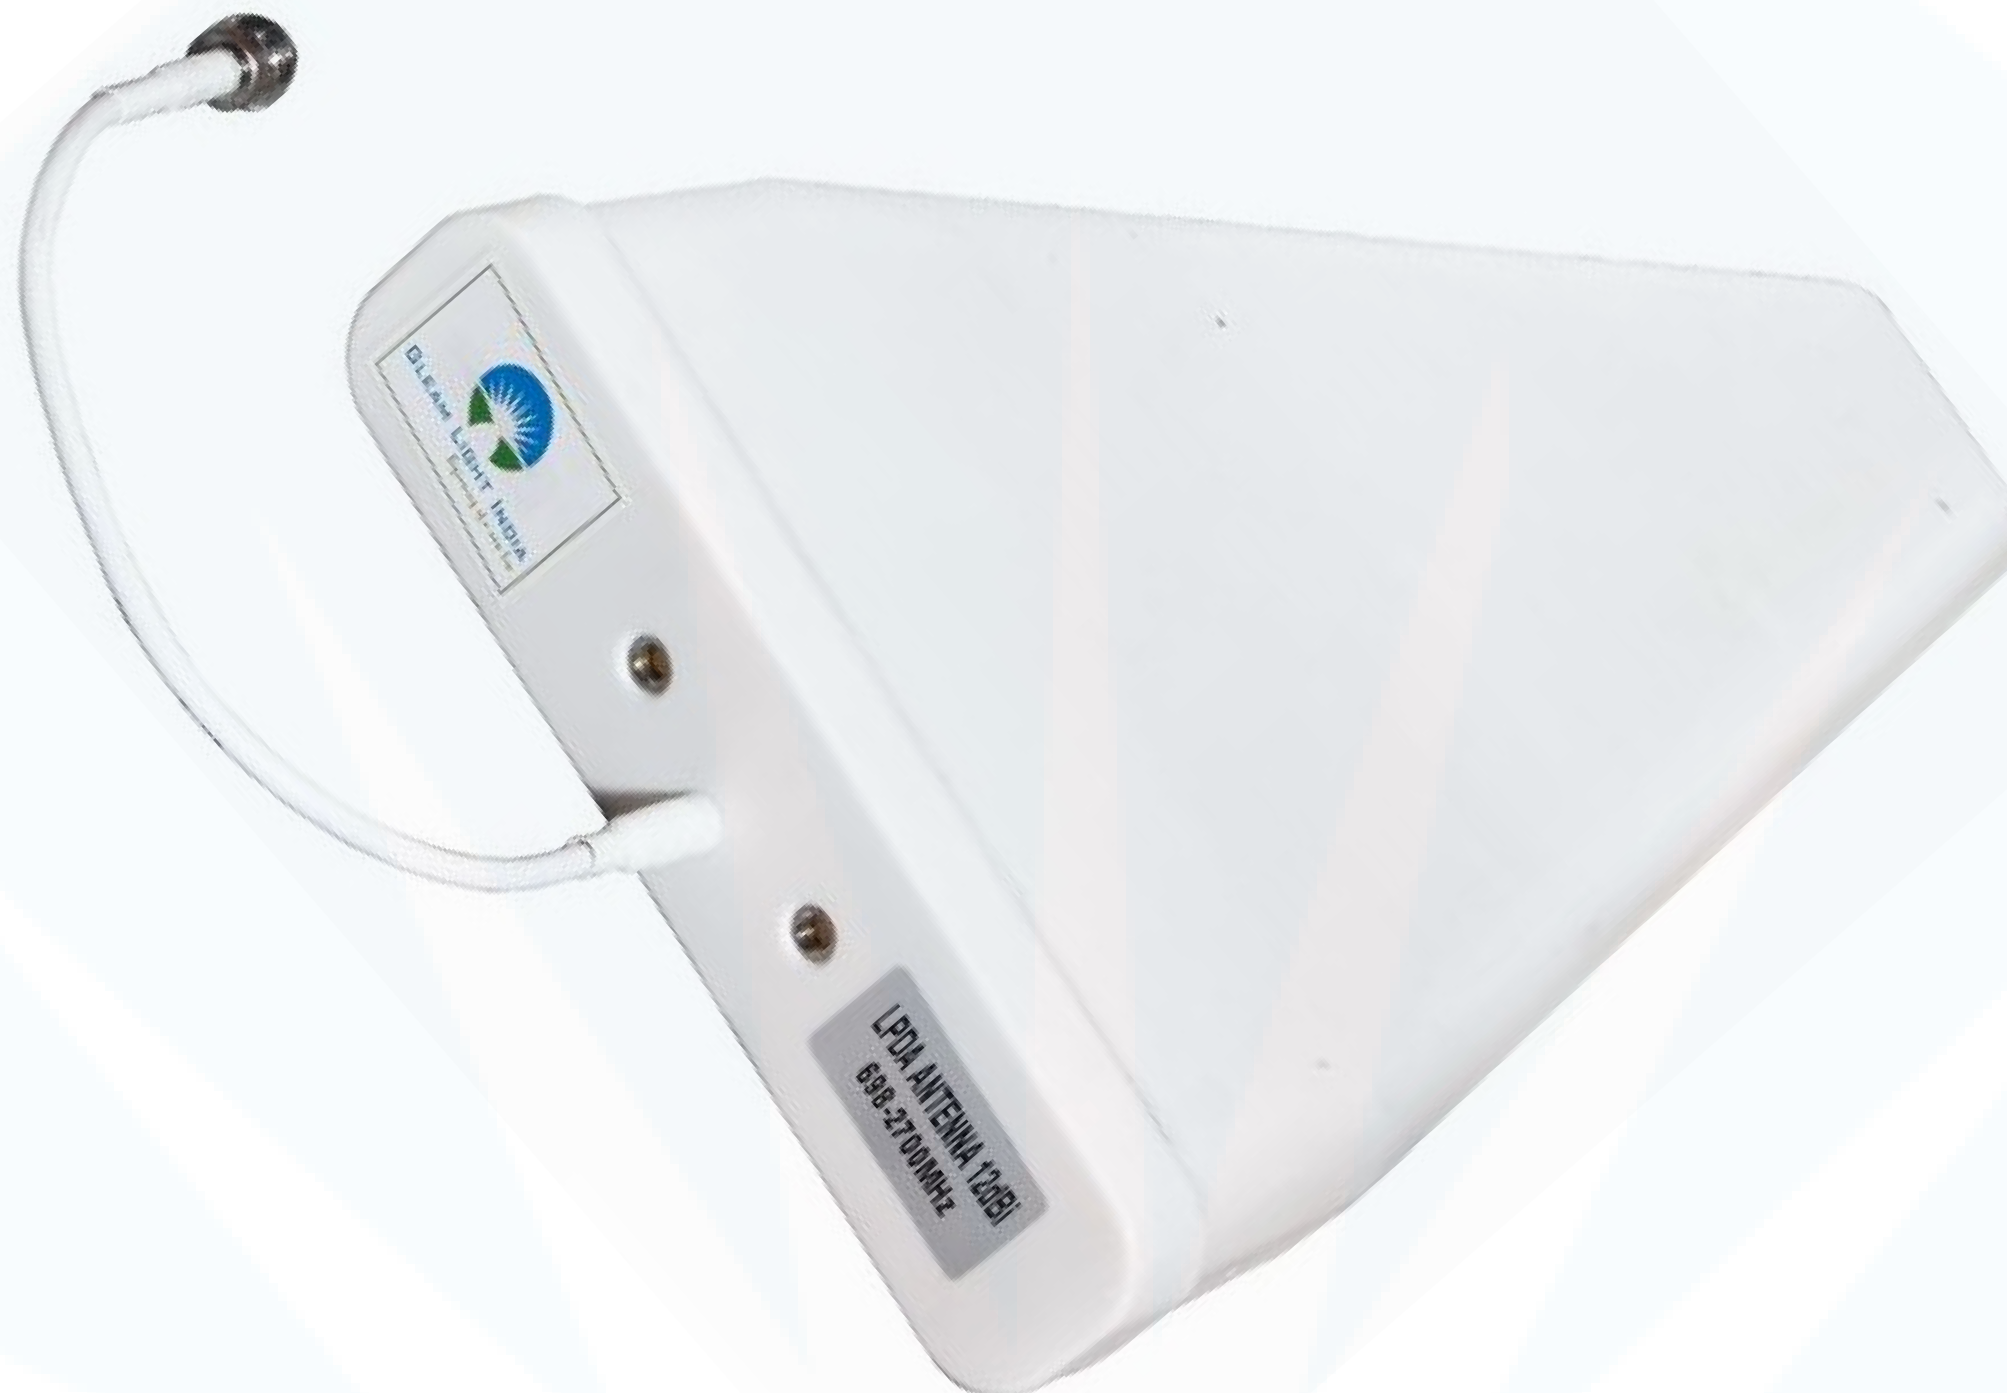

## Technical Specifications:

Model No -	LPDAOD0012
Frequency Range (MHz)	698-960/1710-2700
Beam Width	60±5
Polarization	Vert. 60°, Horiz. 90°
Gain	12 DBI
Lightning Protection	Direct Ground
VSWR	<1.5
Maximum Input Power (W)	100
Impedance(ohm)	50
Connector Type	NF /Customized
Operating Temp	-40 to 55 C
Mount	Pole Mount
Cable Length	200 MM
Cable	RG58
Redome Colour	White
Clamp	U Clamp
ROSH	Compliant




**CALL OR**  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /       
Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com  
12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

# LPDA ANTENNA 12 DBI



An ISO 9001:2015 Certified Company

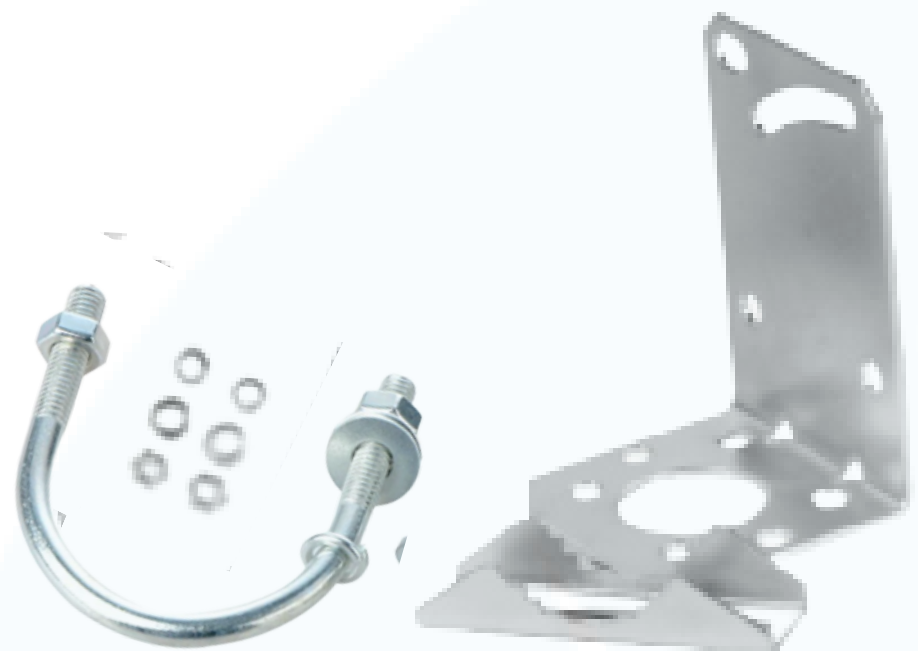

## Mounting Clamp

[Click Here](#)



[Installation Guidance](#)




SMA F  
CONNECTOR




## Product Features

- Affordable Price
- weather proof
- Low Insertion
- Loss Low VSWR
- Easily Installed
- Light Weight
- Wide Frequency Band
- Directional Antenna

## Radiation

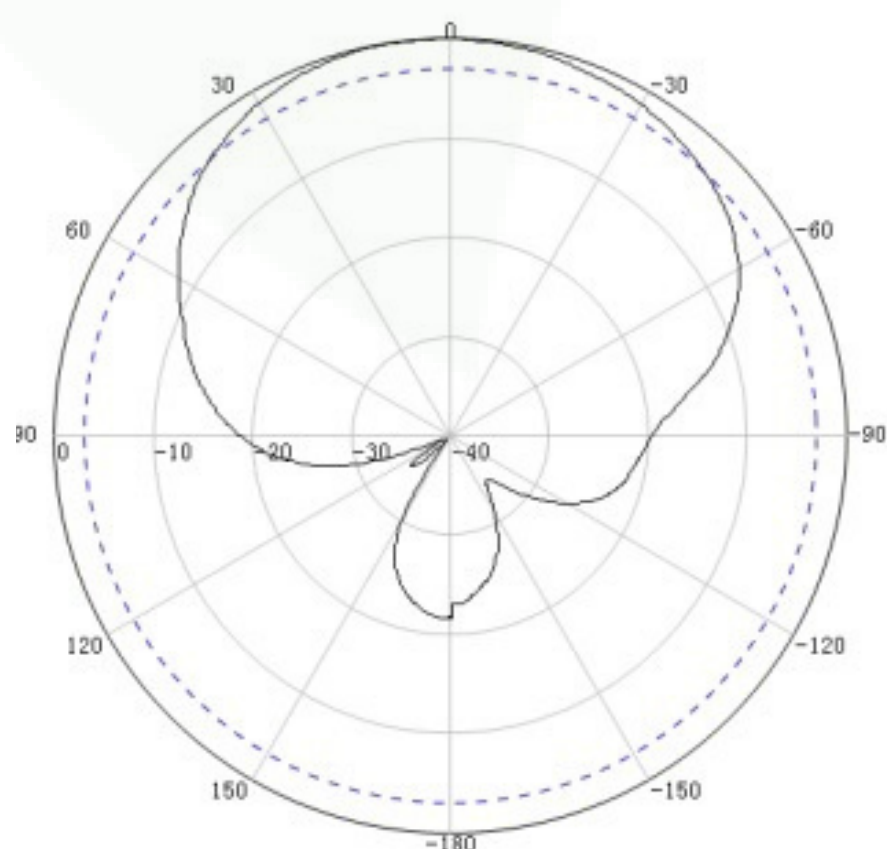

Horizontal Pattern

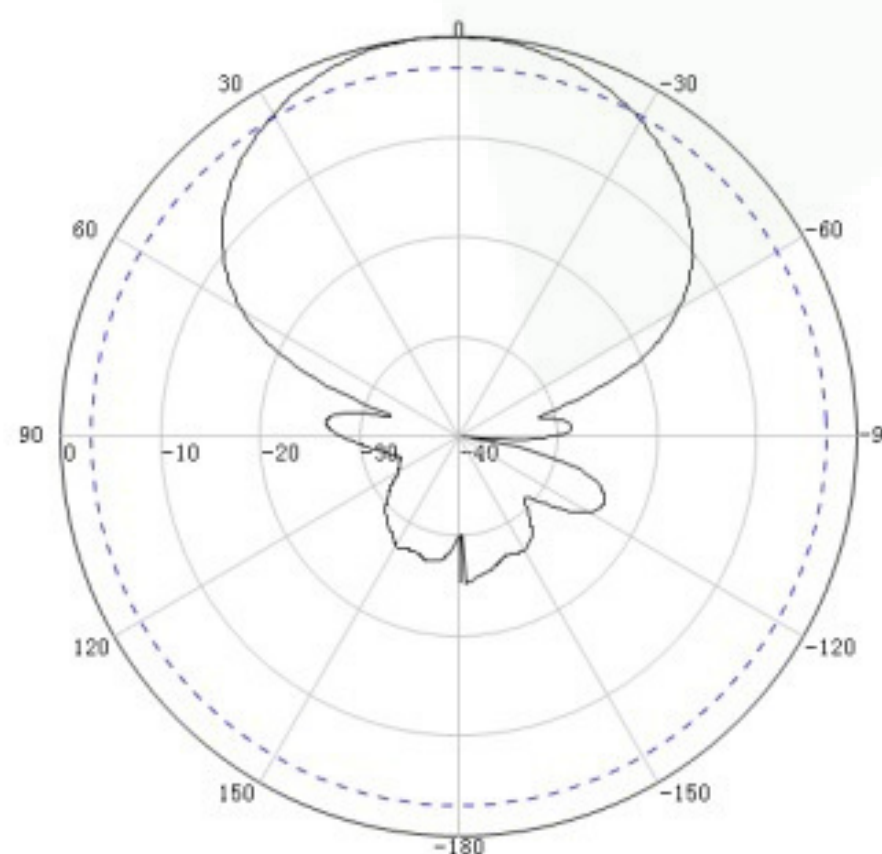

Vertical Pattern



CALL OR  +91-8800386366

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /     

[Info@gleamlightindia.com](mailto:Info@gleamlightindia.com) [www.gleamlightindia.in](http://www.gleamlightindia.in)/[www.gleamlightindia.com](http://www.gleamlightindia.com)/[www.gleamindia.com](http://www.gleamindia.com)

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041