

GLEAM LIGHT INDIA

Beginning of a new Era




An ISO 9001:2015
Certified Company



OMNI DIRECTIONAL ANTENNA

Technical Specifications:

Model No	OMNIODA150
Frequency Range (MHz)	698-960/1710-2700
Polarization	Vertical
Gain dBi	15 Dbi
Horizontal Lobe width (°)	360
Vertical Lobe width (°)	65
Lightning Protection	DC Ground
VSWR	≤1.5
Maximum Input Power (W)	100
Impedance(ohm)	50
Connector Type	N Female/ N Male
Operating Temp -	40-60

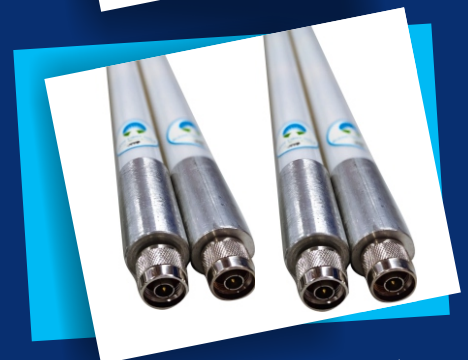

Product Features:-

- High reliability, High gain,
- weatherproof outdoor operation,
- Wide area coverage in 360-Degree
- Fibreglass antenna cover waterproof UV-resistance



www.gleamlightindia.in/gleamlightindia.com

Info@gleamlightindia.com 8800386366

10-A FIRST FLOOR, RAJENDRA PARK EXTN New Delhi -110041