


SMA MALE CONNECTORS FOR RG-174/316



An ISO 9001: 2015 Certified Company

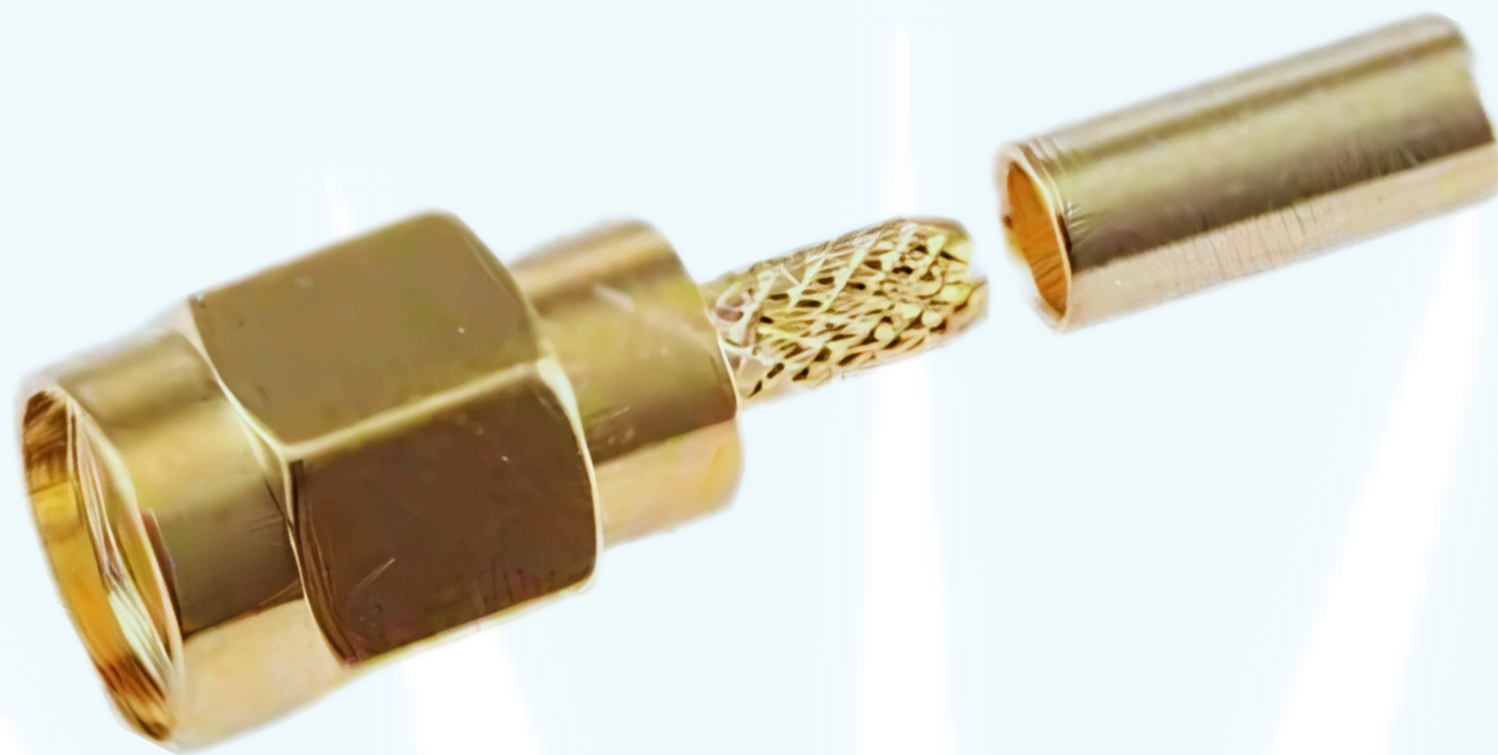

Technical Specifications:

Characteristic Impedance	50 ohm
Frequency Range	DC-6Ghz
VSWR	≤ 1.15 @DC-6GHz
Dielectric Withstanding Voltage	≥ 1000 V RMS,50Hz,at sea level
Dielectric Resistance	≥ 5000 M Ω
Contact Resistance	Center Contact ≤ 3 m Ω Outer Contact ≤ 2.5 m Ω
Durability	Mating Cycles ≥ 500
Operating Temperature Range	-40°C~+85°C
RoHs	Compliant

Material and Plating:

Item	Material	Material
Body	Brass	Au
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Copper	Au



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamlightindia.com / www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041