




An ISO 9001: 2015 Certified Company

SMA Male CONNECTORS FOR LMR 300 CABLES

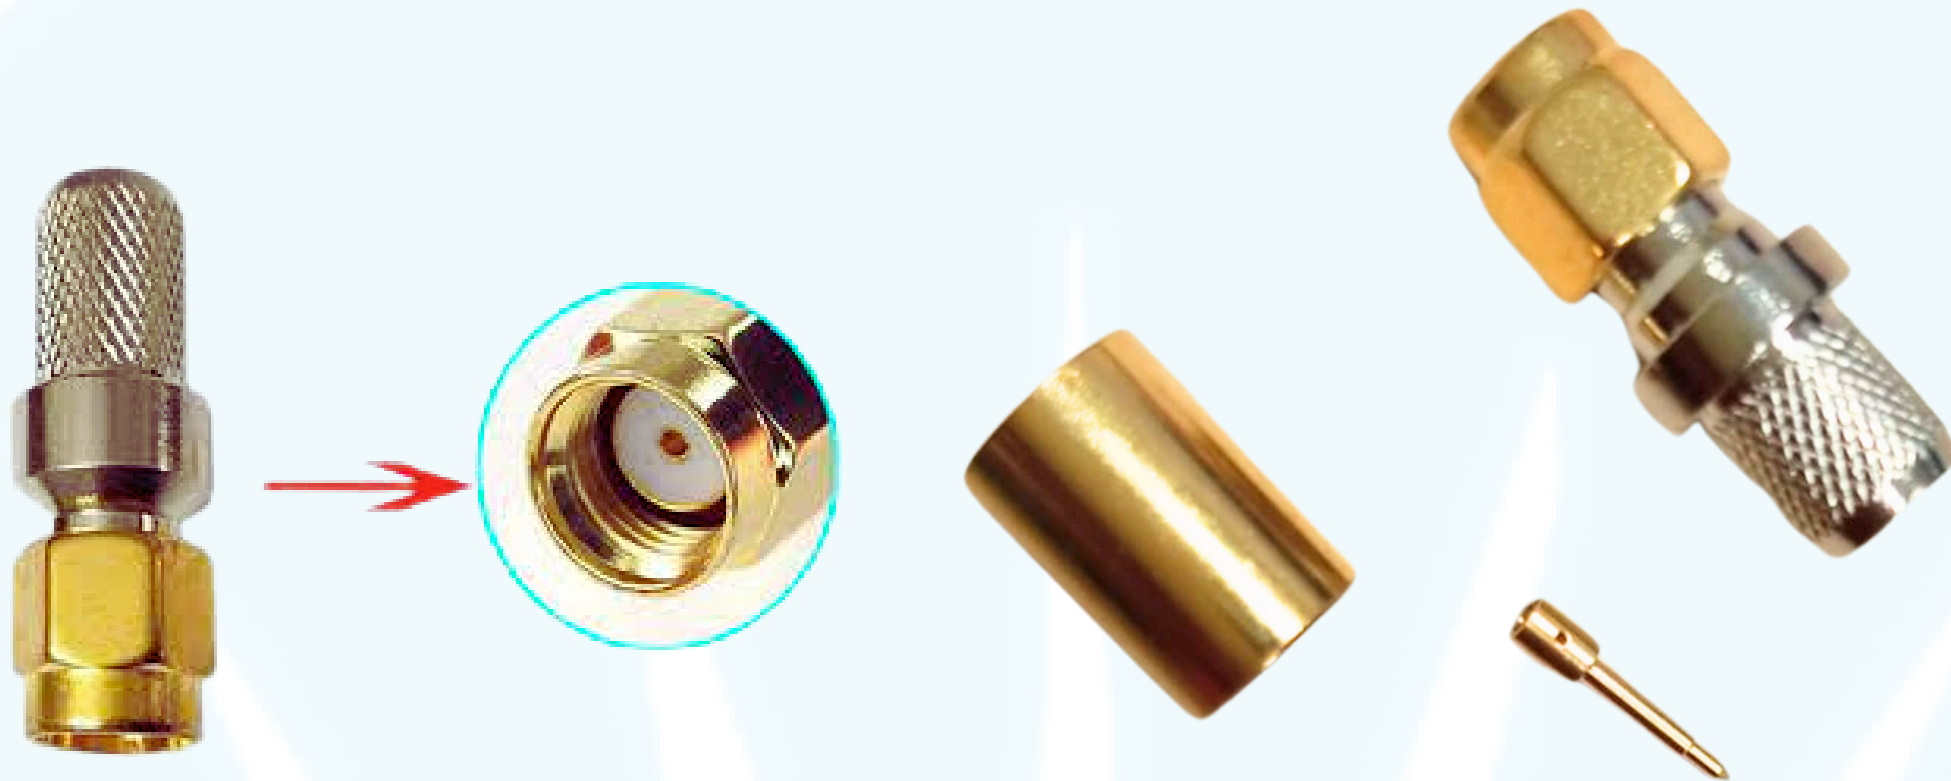

Technical Specifications:

Characteristic Impedance	50 ohm
Frequency Range	0-18 GHz
VSWR	≤1.15@DC-3GHz
Dielectric Withstanding Voltage	≥1000V RMS,50Hz,at sea level
Dielectric Resistance	≥5000MΩ
Contact Resistance	Center Contact ≤3mΩ Outer Contact ≤0.25mΩ
Durability	Mating Cycles ≥500
Operating Temperature Range	-65 °C ~ +165 °C
RoHs	Compliant

Material and Plating:

Item	Material	Material
Body	Brass	Gold plating (Nu)
Insulator	PTFE(Teflon)	Gold plating (Nu)
Center conductor	Beryllium Copper Alloy	Gold plating (Nu)



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamlightindia.com / www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041