


GSM RUBBER DUCK ANTENNA



An ISO 9001:2015 Certified Company

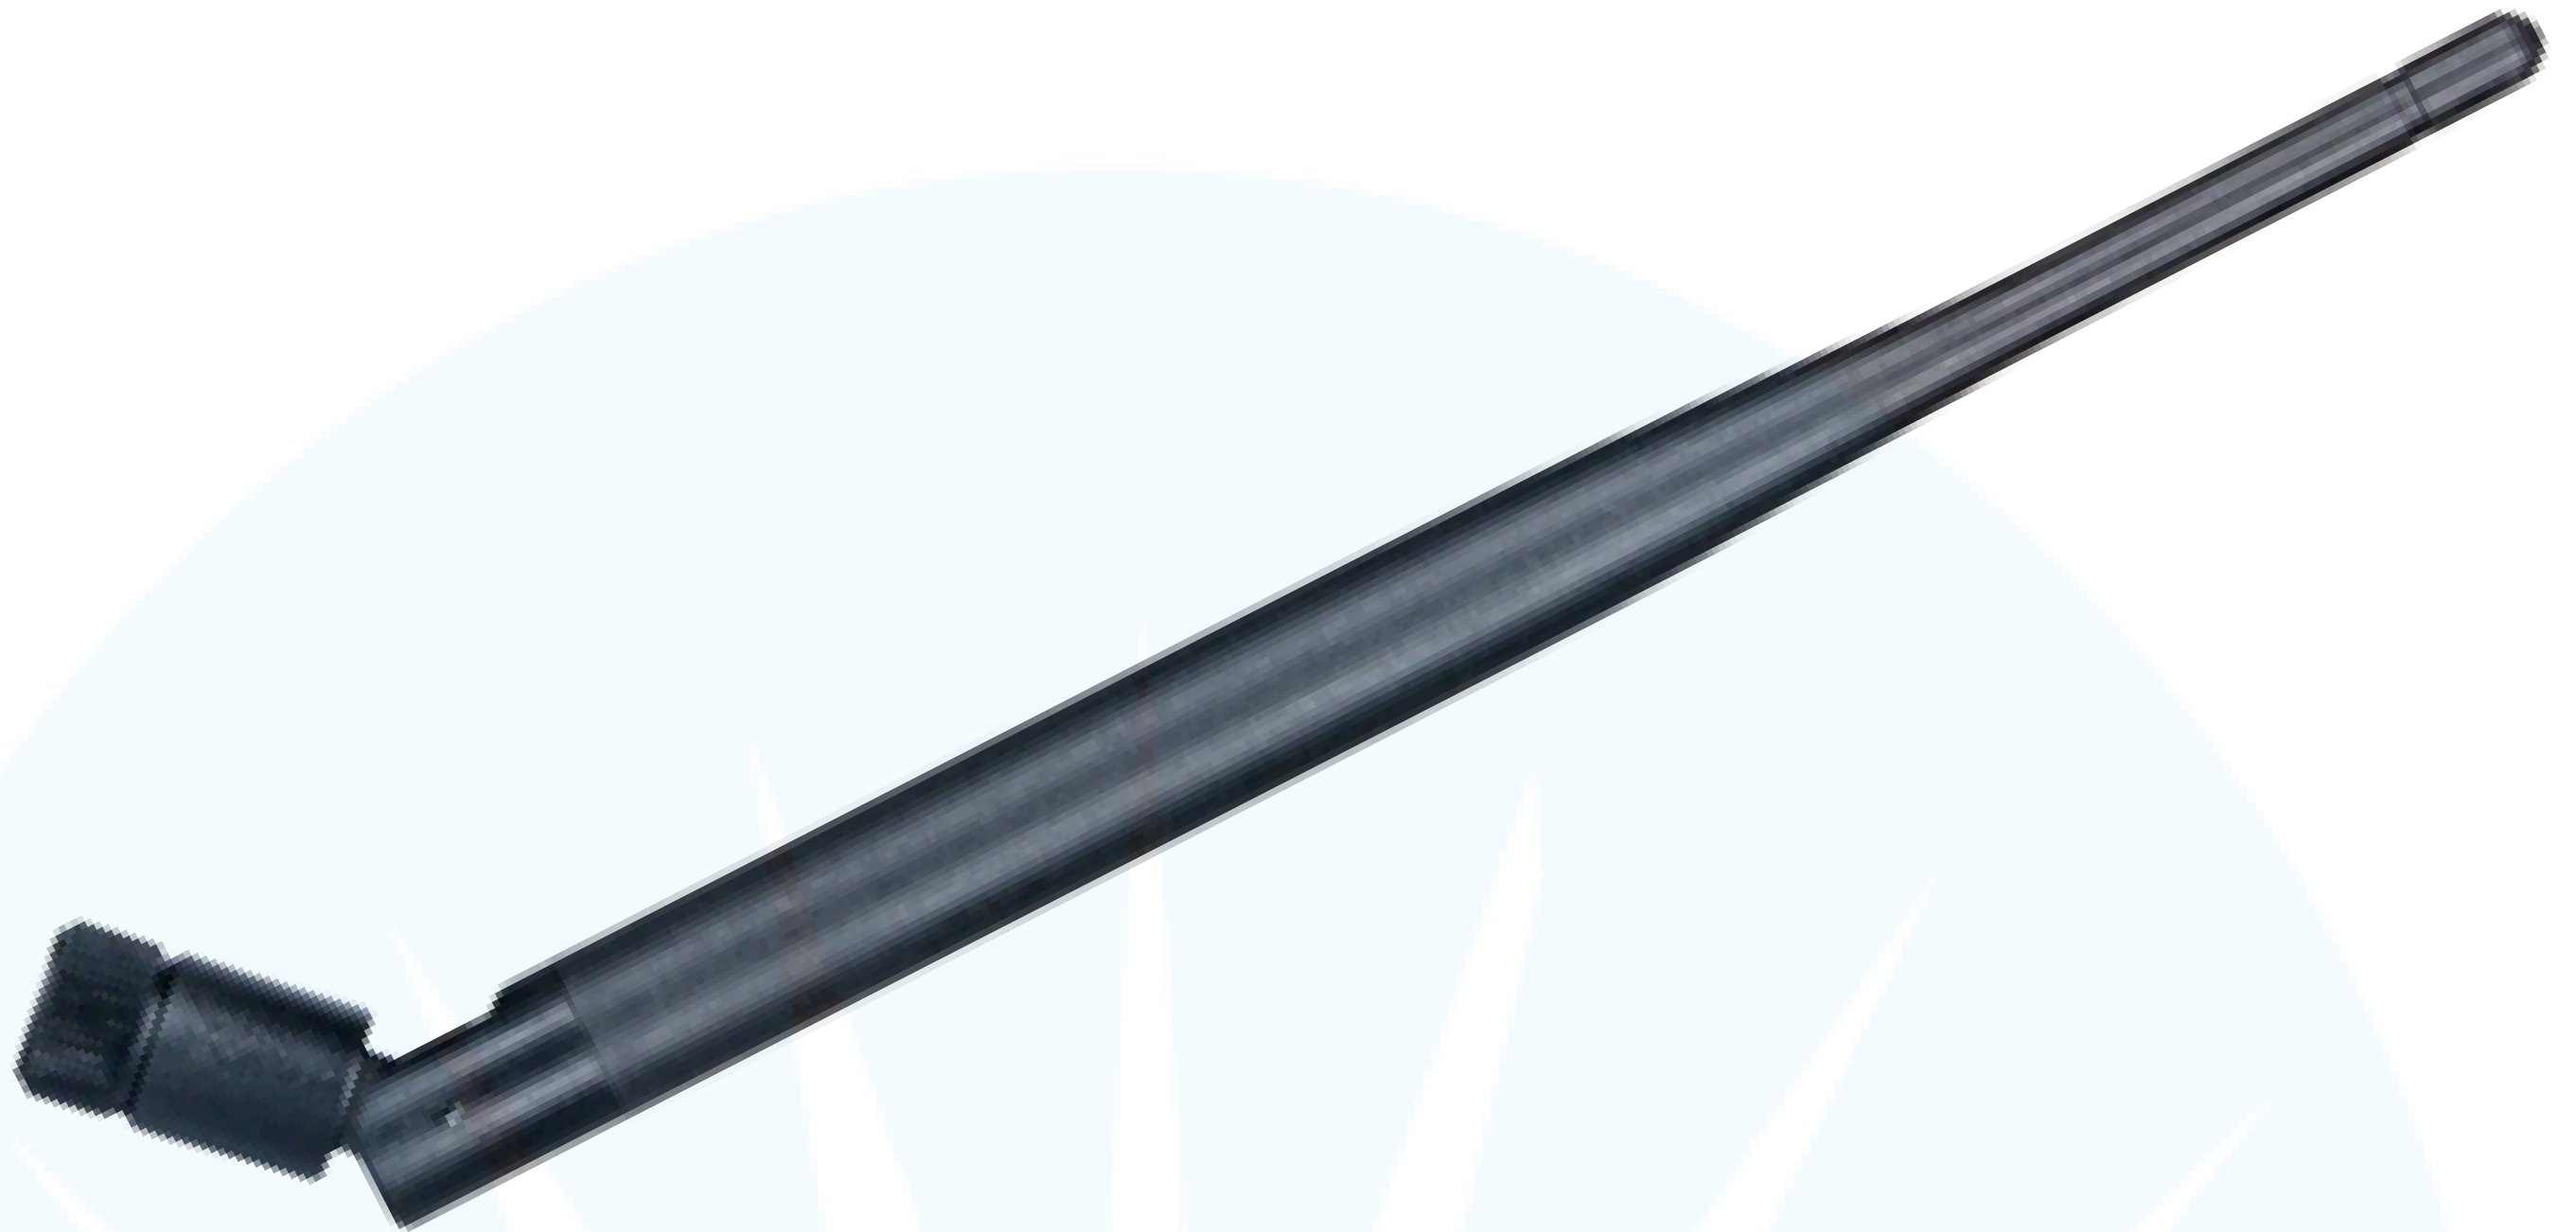

Technical Specifications:

Model No	GSMIDSMA05
Frequency Range (MHz)	824~894/1710~2170
Polarization	Linear
Gain	5 DBI (Zenith)
VSWR	≤2.5
Maximum Input Power (W)	50
Impedance(ohm)	50
Connector Type	SMA M / RP SMA M / NM /TNC M
Operating Temp	-40 °C to +80 °C
Radom Color	Black
ROHS	Compliant
Brand	Gleam Light India

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041



GSM RUBBER DUCK ANTENNA



An ISO 9001:2015 Certified Company

Gain 5 DBI

824-2170 MHZ

Rubber Protector, Waterproof and Prevent from Oxidization

High-quality interface


Quality Screw interface, makes the connection closer and signal more stable

Wide Angle

90°-180°

7.12
inch


CONNECTOR TYPE

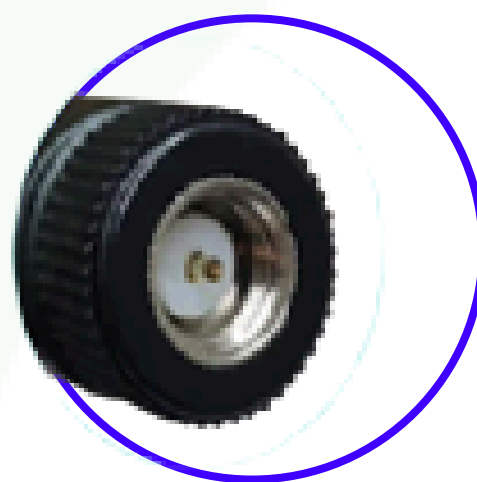

SMA M



RP SMA M

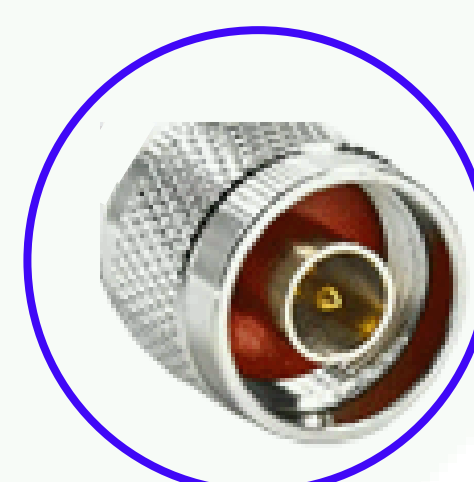

N M



TNC M

CALL OR  +91-8800386366

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

