
YAGI ANTENNA 18 Dbi



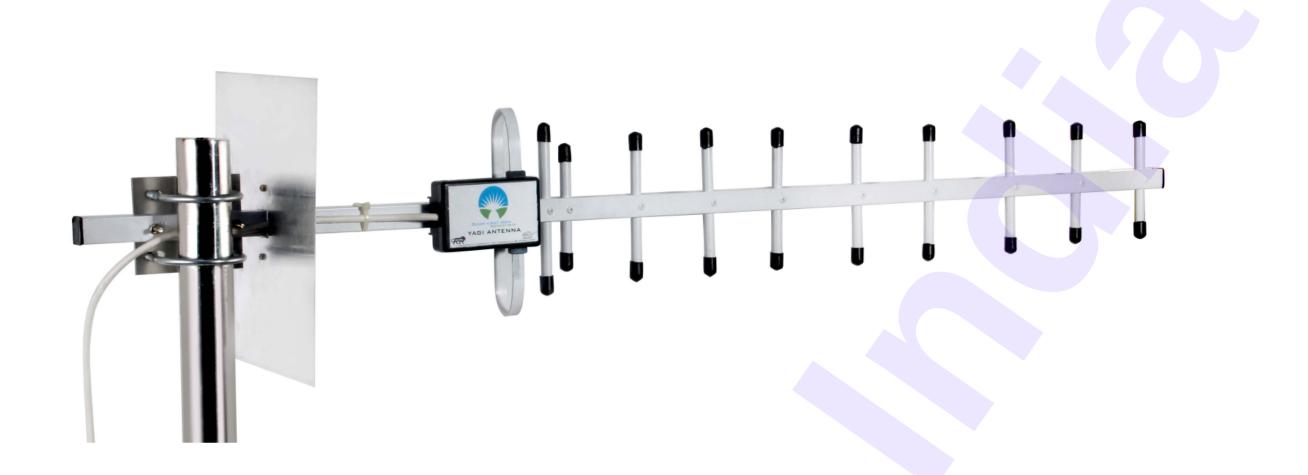

Technical Specifications

- Model No
- Frequency Range (MHz)
- Beam Width
- Polarization
- Gain
- Lightning Protection
- VSWR

YAGOD4G018 698-960/1710-2700 60 ± 50 Vertical 18 DBI Direct Ground <1.5:1

100

- Maximum Input Power (W)
- Impedance(ohm)
- Connector Type
- Operating Temp
- Mounting
- Cable Length
- Cable
- Compliances
- ROHS

50 SMA M/N F/ Customized 40 to 55 C Clamp Type / Pole Mount 300 MM / Customized RG58 CE compliant ROHS Compliant

FEATURES

- Wide Frequency Range
- Light Weight
- High gain
- Easy to Install
- Vertical or Horizontal Polarization
- All-Weather Operation
- Best for Outdoor applications.





CALLOR S +91-8800386366 Follow Us For More Updates GLEAMLIGHTINDIA / G C O O Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com 12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

YAGI ANTENNA 18 Dbi




High Quality Aluminium Structure



The connections between elements and other components is secure and wellconstructed to minimize losses and ensure stable performance over time.

The unique design of the yagi antenna feed which works as matching device to keep the VSWR low resulting in increased efficiency of the yagi with reflector.

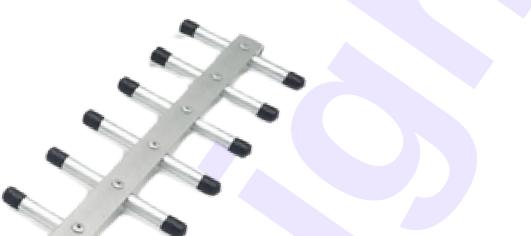



A GSM Yagi antenna is a useful tool for improving the reliability and

coverage of GSM networks, and can be used in a variety of applications.

The antenna is also be robust and reliable, with stable performance over time and in various environmental conditions.









YAGI ANTENNA 18 Dbi




Antenna Mounting Clamp

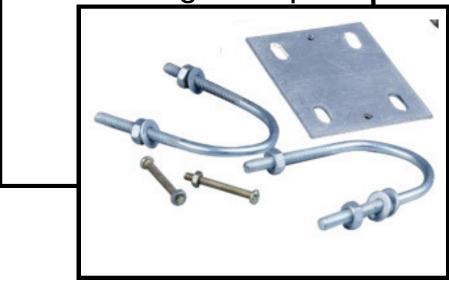

The clamps are designed to securely fasten the antenna to the support structure.

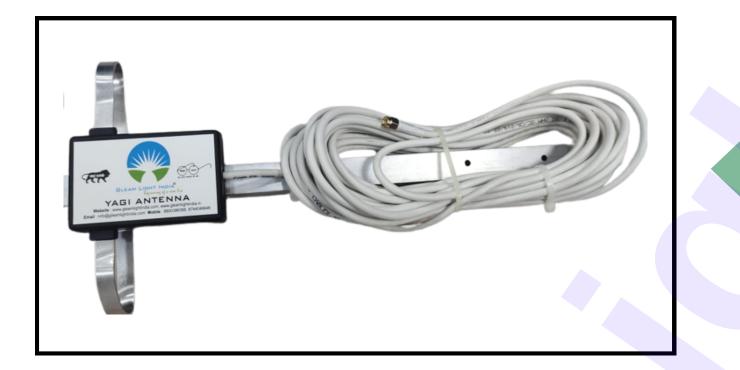

Cable Rg 58

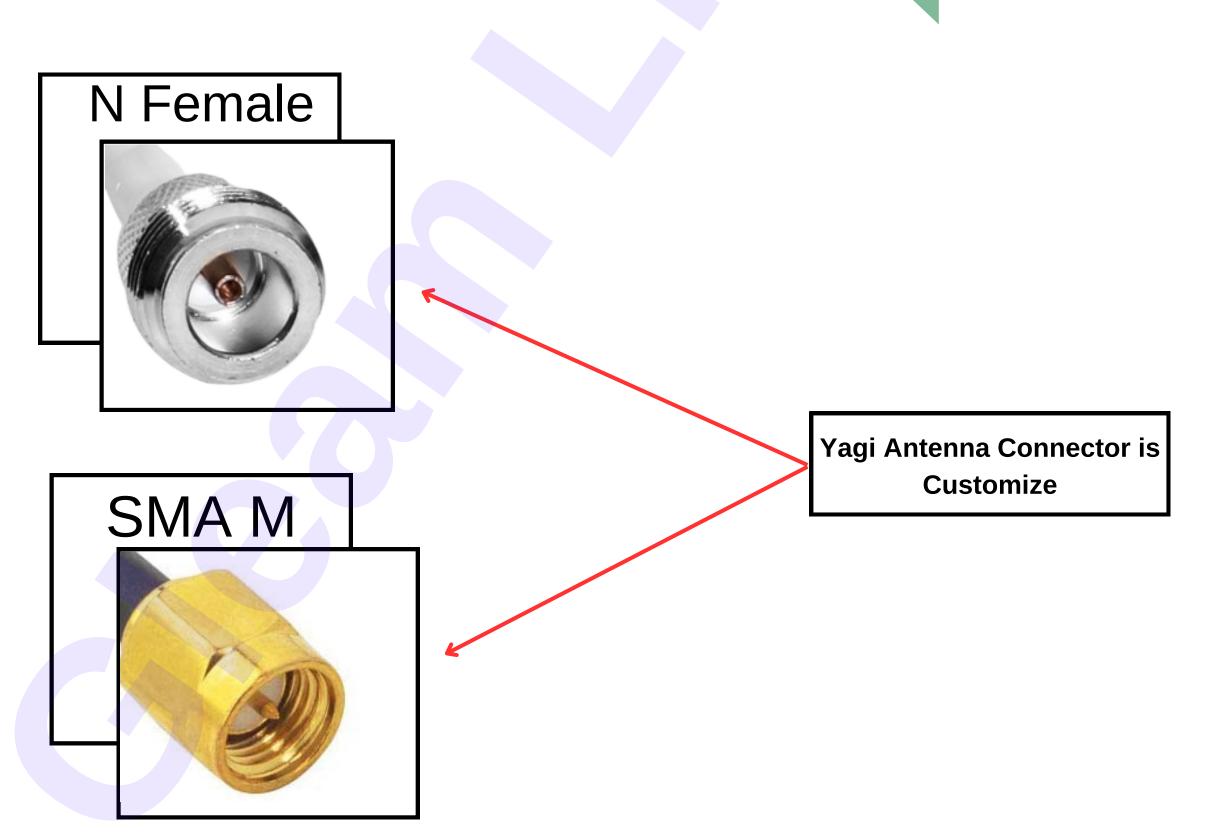



CALLOR +91-8800386366 Follow Us For More Updates GLEAMLIGHTINDIA / CO Info@gleamlightindia.com www.gleamlightindia.in/gleamlightindia.com 12B Block - A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041